




<Mate side View>

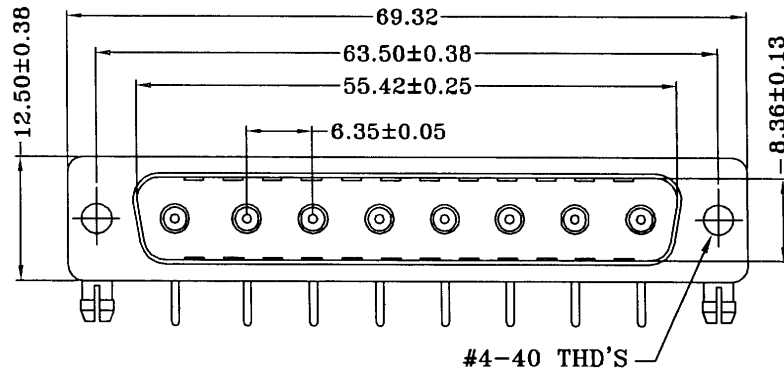


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 DIMPLES ON PLUG ONLY
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
 COAXIAL INSULATOR : TEFLON UL 94V-0 WHITE COLOR
 COAXIAL CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE :
 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C

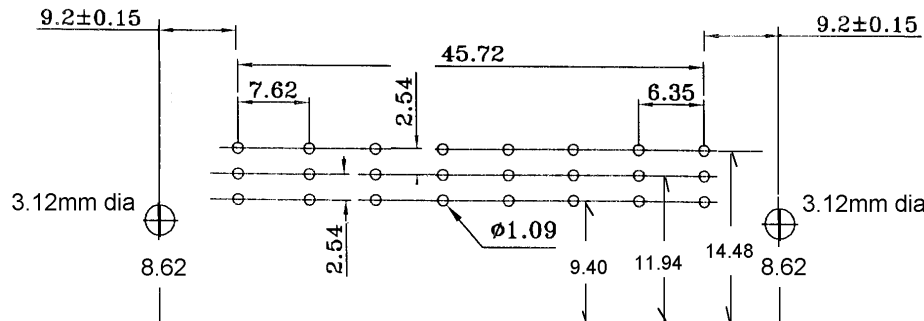

Rear Flange Ref.
PCB LAYOUT

DR : RON CHEN

CHK : J.T.CHEN

APPD : C.Y.LIN



HO CHIEN ENTERPRISE CO. LTD

TITLE : D-SUB CONNECTOR
 (Coaxial Conatct R/A Type)

PAGE: 1 OF 1

HO CHIEN P/N.

1350 -88T -S