
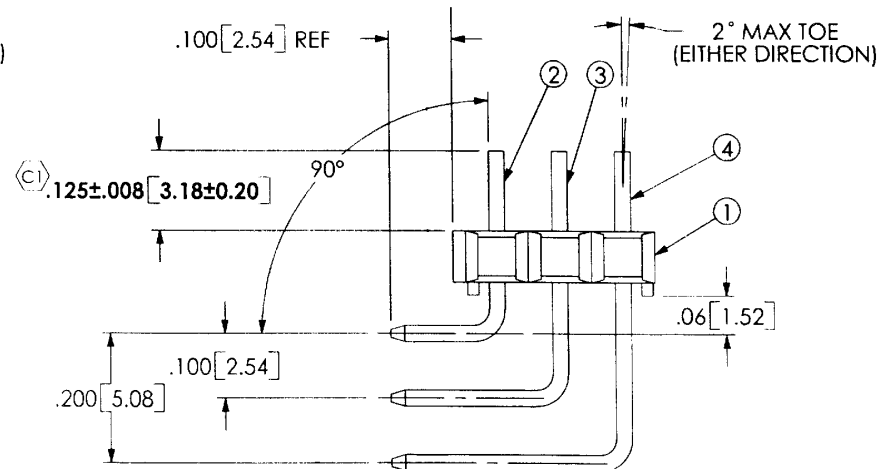
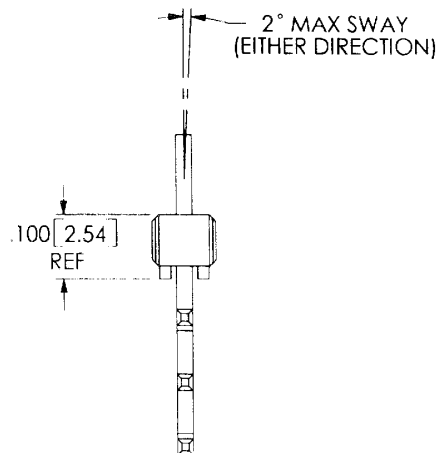


NOTES:

1. SHEAR POSTS TO .125[3.18].
2. Ⓢ REPRESENTS A CRITICAL DIMENSION.
3. MAXIMUM CUT FLASH: .020[.51].
4. MINIMUM PUSHOUT FORCE: 3.0 LB.
5. MAXIMUM HEIGHT VARIATION BETWEEN ANY TWO POSTS: .005[.13].
6. ALL DIMENSIONS TO BE ABOUT C.L. WITHIN +/- .005[.13].
7. SHEAR POSTS TO DIMENSION SHOWN.
8. MAX BURR: .003[.08]
9. PARTS TO BE PACKAGED IN BULK.
10. PLATING: TIN PLATING OVER NICKEL. (LEADFREE)
11. CONTACT MATERIAL: PHOSPHOR BRONZE
12. HOUSING MATERIAL: THERMOPLASTIC UL94V-0

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

DECIMALS	ANGLES
.XX: +.01[.3]	2°
.XXX: +.005[.13]	
.XXXX: ±.0020[.051]	

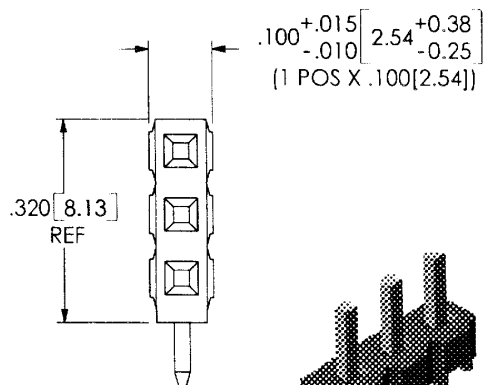

HO CHIEN
www.hochien.com

PN#

2543-3X1T-01