


CABLE COAX 18" 1505A (BNC to BNC)

FIGURE 1: CABLE ASSEMBLY

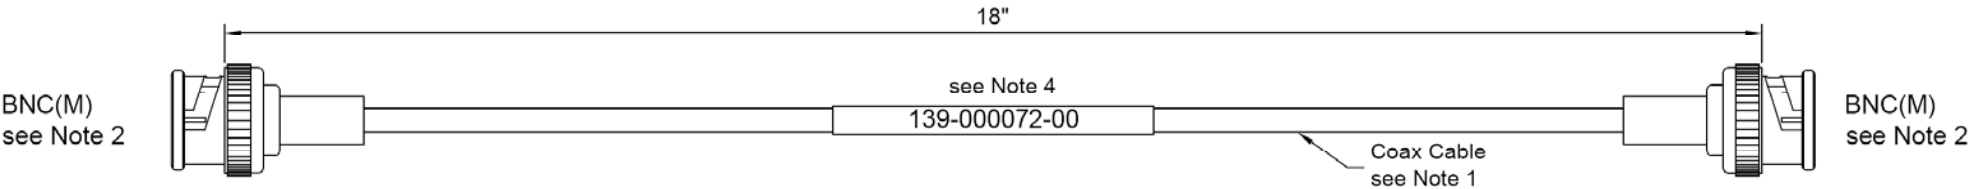

NOTES:

1	Coax Cable: - 20 AWG, 3 GHz, RG-59/U RF BNC cable - Wires shall be labelled as shown. - Manufacturer's Equivalent: Belden #1505A
2	1 PN or Manufacturer's Equivalent: - BNC(M): Amphenol #31-70239 or Canare #BCP-C4F or Cambridge Components #CPMC-68-35 Note: Total line impedance must be 75 ohm for any cable terminated with a BNC.

NOTES:

3	Testing for shorts and continuity shall be required. No shorts between adjacent pins and between connectors.
4	Labels shall be permanent and legible.
5	Exposed wiring is not allowed.
6	Cable assembly shall be free of hazardous materials including lead and halogens.

SOURCE CONTROL DRAWING