



Molded MiniDIN Connector
4 positions
4 contacts

Flat Orientation
Surface

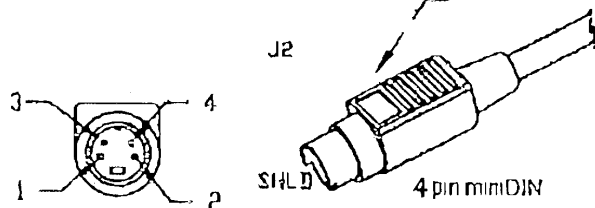


J2	J1	SIGNAL
1	5	GLOSSY BLACK
2	4	WHITE
3	1	GREY
4	3	RED
GREY	2	DULL BLACK

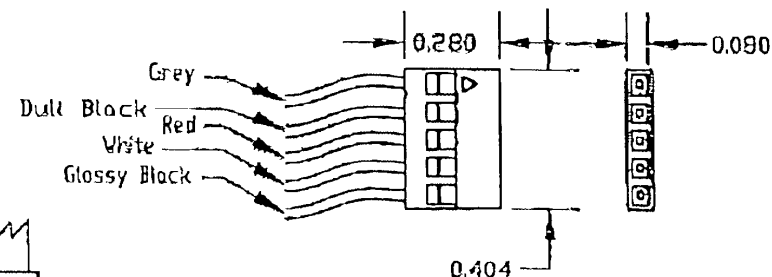

5p 2mm Receptacle
5 pin receptacle

Cable: 5 conductor minimum - shielded
Cable Color: white
Cable #24-#28 AWG, O.D. .25" Max

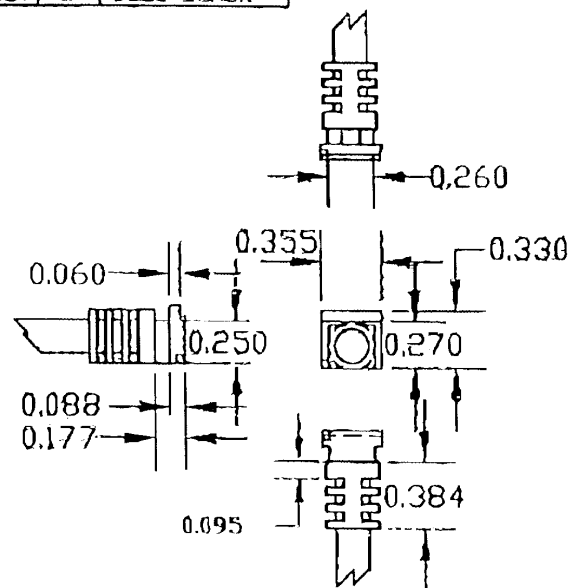

HO CHIEN

ORDY: JSAbbot	ENG: Best One
DATE: 1/13/04	DATE: 3/10/04
SCALE: NTS	DO NOT SCALE PRINT
THIS DOCUMENT CONTAINS CONFIDENTIAL AND/OR PROPRIETARY INFORMATION AND IS NOT TO BE REPRODUCED, DISTRIBUTED OR DISCLOSED WITH OUT PRIOR APPROVAL OF Headset OR ITS DESIGNATED AGENT.	Q.A.: Don Engler
MATERIAL: See Notes	DATE: 3/05/04
FINISH: Cable - External Oximeter	WFO: Chad Riech
TITLE: CA-B6060-0005	DATE: 3/05/04
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
	TOLERANCE
	FRACTIONAL DECIMALS
	ANGLES = 1/2 INCHES
	DWG NO: 6020038B1
	REV. 2
	SHT. 1 OF 1