

NOTES:

(UNLESS OTHERWISE SPECIFIED)



1. WIRING USED IN THE CABLE ASSEMBLY MUST BE UL RECOGNIZED.
2. CONNECTORS AND ALL OTHER COMPONENTS MUST BE UL RECOGNIZED OR MADE OF A UL RECOGNIZED MATERIAL WITH A MINIMUM FLAME RATING OF 94V-2.
3. TRACEABILITY OF THE ABOVE MUST BE MAINTAINED BY THE VENDOR AND BE MADE AVAILABLE UPON REQUEST.

4 PURCHASE AS ASSEMBLY:

AXON P/N: FFC1.D0A08/0092L440808SBBB + MARK
 FLAT FLEX CABLE, 1.00MM PITCH, STRIPPED AT BOTH ENDS
 WITH REINFORCEMENT ON SAME SIDE, 8 CONDUCTOR,
 INSULATED LENGTH 92MM, 4MM STRIPS, 8MM REINFORCEMENT,
 STANDARD CONDUCTOR THICKNESS, MARKED WITH AXON AND UL,
 ENDS 1 AND 2 BLUE, NO GROUNDS.

5. DIMENSIONS ARE IN MM.

- 6** MARK WITH PART NUMBER, REVISION, AND DATE OF MANUFACTURE IN APPROXIMATE LOCATION SHOWN.

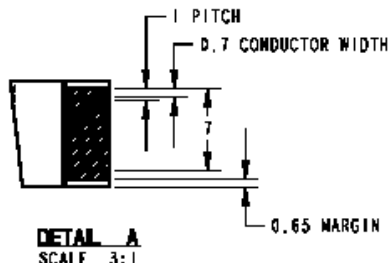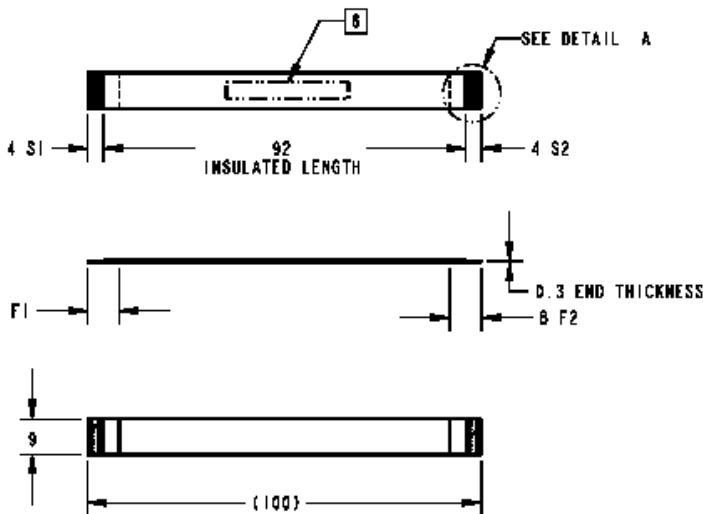

ITEM	QTY	DESCRIPTION	REFERENCE
FLAT FLEX CABLE, 8 COND, REINFORCED ENDS			
BILL OF MATERIALS			
APPROVALS		DATE	
DESIGNED BY	EAJ	DATE	07-30-01
CHECKED BY	MKD	DATE	07-31-01
APPROVED BY			
REV	1398	DATE	08-14-01
RETRY			
FINISH			
HO CHIEN		REV. A	
CABLE ASSY, FLAT FLEX, TOUCH PAD TO NUMERIC, CT PC BOX 42-1186		CA-C4037A-0014	
SCALE	1:1	END FILE	42-1186
THIRD ANGLE PROJECTION		SHEET 1 of 1	

ZONE	REV	ECO-	DESCRIPTION	DATE	APVD
A	1398		PRODUCTION RELEASE	08-14-01	EAJ