

**NOTES:**  
(UNLESS OTHERWISE SPECIFIED)




REV	REV	DESCRIPTION	DATE	APPD
A	1398	PRODUCTION RELEASE	08-14-01	EAF

1. WIRING USED IN THE CABLE ASSEMBLY MUST BE UL RECOGNIZED.
2. CONNECTORS AND ALL OTHER COMPONENTS MUST BE UL RECOGNIZED OR MADE OF A UL RECOGNIZED MATERIAL WITH A MINIMUM FLAME RATING OF 94V-2.
3. TRACEABILITY OF THE ABOVE MUST BE MAINTAINED BY THE VENDOR AND BE MADE AVAILABLE UPON REQUEST.

4. PURCHASE AS ASSEMBLY.  
MERITEC P/N: FFCFFA7T4IB16.00NYO0HN  
FLAT FLEX CABLE, FEMALE TO FEMALE, A-7 ORIENTATION, UNSHEILD MYLAR, 41 COND. HIROSE, 0.5MM PITCH, 16" IN LENGTH, NO FOLDS, WITH LABEL, NO FERRITE, NO DRAIN.  
OR  
AXON P/N: FDC-41/0407BFF10 + MARK  
FLAT DISPLAY CABLE, 41 COND., APPROX 16" IN LENGTH, HIROSE DF9 CONN., FEMALE TO FEMALE, B-10 ORIENTATION.

<http://www.axon-cable.net/pdf/AxolinkANG.pdf>

5. LABEL WITH PART NUMBER, REVISION, AND DATE OF MANUFACTURE IN APPROXIMATE LOCATION SHOWN.

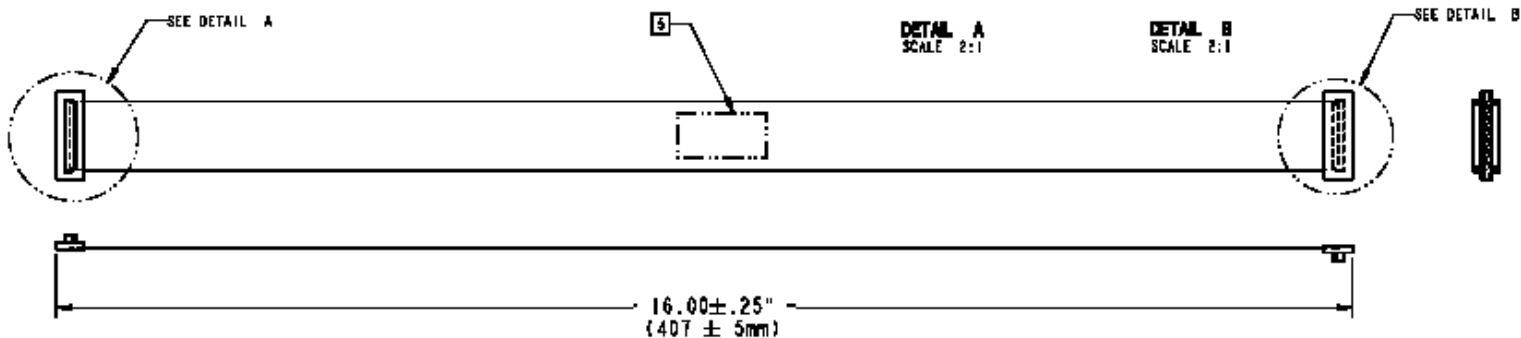

4	1	CABLE ASSY, FLAT FLEX, 41 COND, FEMALE TO FEMALE, HIROSE	
ITEM	QTY	DESCRIPTION	REFERENCE

BILL OF MATERIALS		HO CHIEN	
APPROVALS	DATE	CA-C4037A-0018	
DESIGNED BY: EAF	07-30-01		
CHECKED BY: BHD	07-31-01		
DATE: 08-14-01			
REV	DATE	REV	DATE
1398	08-14-01	A	
		42-1192 1 of 1	