


NOTES:

(UNLESS OTHERWISE SPECIFIED)

1. WIRING AND TUBING USED IN THE CABLE ASSEMBLY MUST BE UL RECOGNIZED.
2. CONNECTORS AND ALL OTHER COMPONENTS MUST BE UL RECOGNIZED OR MADE OF A UL RECOGNIZED MATERIAL WITH A MINIMUM FLAME RATING OF 84V-2.
3. TRACEABILITY OF THE ABOVE MUST BE MAINTAINED BY THE VENDOR AND BE MADE AVAILABLE UPON REQUEST.
4. LABEL TO CONTAIN: PART NUMBER REVISION LABEL, AND DATE CODE OF MANUFACTURER.

ZONE	REV	EDD #	DESCRIPTION	DATE	APVD
	A	1437	PRODUCTION RELEASE	10-28-01	SLK

CHART: WIRE SPECIFICATIONS					
WIRE NO.	LENGTH (IN)	COLOR	AWG	INSUL	QTY REQD
1	20.0	RED	28	UL1007	1
2-5	20.0	YEL	28	UL1007	4

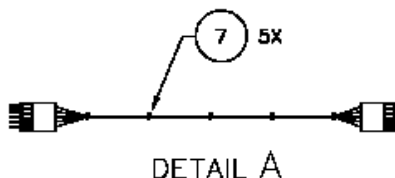

DIGIKEY P/N WM2200-ND
 DIGIKEY P/N WM2003-ND
 AVNET P/N 102107-2
 MOUSER P/N 874999-9
 ALT CONSTRUCTION

REV	QTY	DESCRIPTION	REFERENCE
7	5	WIRE TIE, NYLON	
6	4	WIRE, SEE CHART	
5	1	WIRE, SEE CHART	
4	5	TERM, CRIMP, P/N 08-50-0114	MOLEX
3	1	HSNG, 5 COND, SNGL ROW P/N 22-01-3057	MOLEX
2	5	TERM, CRIMP, GOLD, P/N 102107-2	AMP
1	1	HSNG, 5 COND, SNGL ROW, P/N 571-874889	AMP

BILL OF MATERIALS			
DIMENSIONS UNLESS SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS ANGLES .001 .005 .010 .020 .030 .040 .050 .060 .070 .080 .090 .100 DO NOT SCALE DRAWING THIRD ANGLE PROJECTION	APPROVALS DRAWN: HYLTON CHECKED: SLK APPROVED:	DATE 10-28-01 10-28-01	<h1>HO CHIEN</h1> <p>TITLE: CBL, ASSY, TOUCH PAD ANES. WORKSTATION</p> <p>REV: A</p>
	EDD: 11.57 WEIGHT: FINISH:	SCALE: NTS AGAG FILE 427081A1	