


ZONE	REV	ECD*	DESCRIPTION	DATE	APVD
A	2002		PRODUCTION RELEASE	D8-02-04	IH

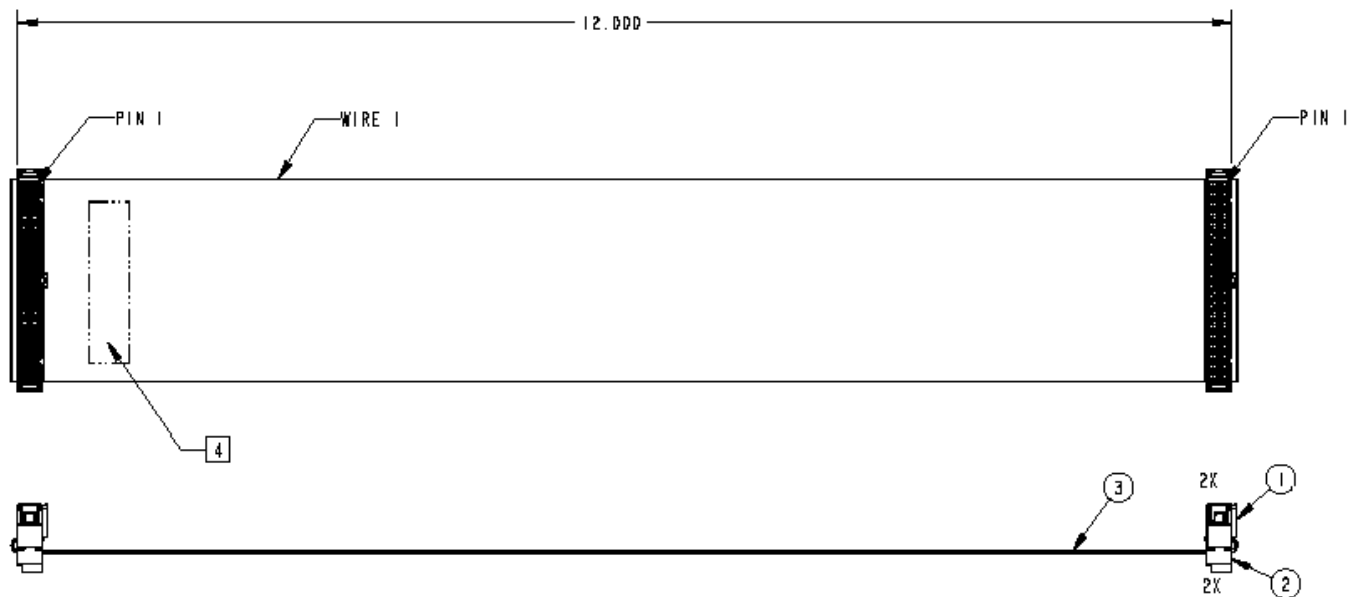

- NOTES:
1. WIRE AND TUBING USED IN THE CABLE ASSEMBLY MUST BE UL RECOGNIZED.
 2. CONNECTORS AND ALL OTHER COMPONENTS MUST BE UL RECOGNIZED OR MADE OF A UL RECOGNIZED MATERIAL WITH A MINIMUM FLAME RATING OF 94V-2.
 3. TRACEABILITY OF THE ABOVE MUST BE MAINTAINED BY THE VENDOR AND BE MADE AVAILABLE UPON REQUEST.

4 LABEL WITH PART NUMBER, REV, DATECODE AND VENDOR ID IN APPROXIMATE LOCATION SHOWN.

3	AR	ROUND COND, FLAT CBL, 28 AWG, .05 PITCH, P/N 3365-40 OR EQUIV	3M
2	2	RECEPT, STRAIN RELIEF, 40 PIN P/N 499252-1	ANP
1	2	RECEPT, NOVO, 4D PIN, UL94V-0, NON-KEYED, P/N 746285-9	ANP
ITEM	QTY	DESCRIPTION	REFERENCE

APPROVALS		DATE	TITLE
DRAWN	I HILL	07-07-04	
ENTERED	SKK	07-07-04	
APPROVED			
DES			
THIRD ANGLE PROJECTION			SIZE B SCALE 1:1 PART FILE 42-7D74 SHEET
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. DECIMALS .01 ANGLES .5° .XXX .002 .XXX .010 DO NOT SCALE DRAWING			REV. A CA-C4037A-0024 42-7D74

