


HO CHIEN

PN# CA-M0001-0014

DATE: 3/8/05'


.100 (2.54mm) Flat Flex Cable Material: • Conductors: Un-plated copper per QQ-C-502 • Insulation: Flame retardant polyester film
Performance Characteristics: • Current Rating: 2 amperes (28AWG equivalent) • Voltage Rating: 300 volts • Temperature Rating: -20°C to +105°C • Insulation Resistance: 5000 megohms (min.) • Insulation Flammability: Polyester, self-extinguishing per UL Flame Test VW-1

Solder Tab to Solder Tab

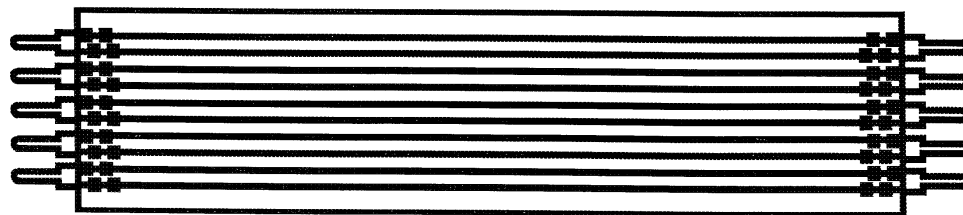

2"

5 Conductor with Tab Pin

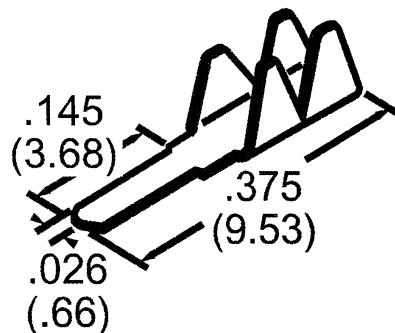

Solder Tab pin