
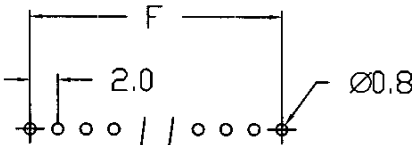
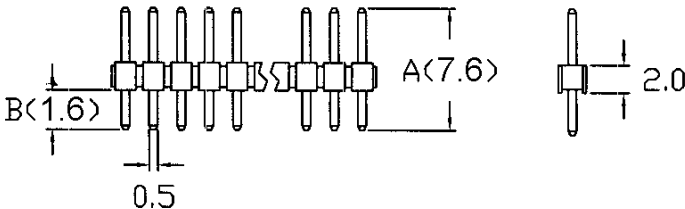


2524-1X □□ G7.6

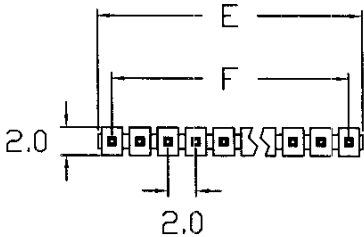

P.C.B. Board Layout

MATERIAL & ELECTRICAL
INSULATOR : P.B.T. +30 % Glass fiber UL 94-V0
CONTACT : Brass
CURRENT RATING : 1 Amp
CONTACT RESISTANCE : 20mΩ Max. at 100mA DC
INSULATOR RESISTANCE : 500MΩ Min. at 500V DC
TEMPERATURE : -55°C ~ +105°C

UNIT : mm
TOLERANCE : ± 0.2

REVISION	DESCREPTION	DATE	APPD
0	SET UP	MAR/17/2000	C.Y.LIN

2524 - 1 x □□ (A)

NO. OF CONTACT _____
2 ~ 40 pos

CONTACT PLATING _____
G=Gold plated
T=Tin plated

PIN LENGTH _____
* Black color only

Dimension (mm) Tolerance : ± 0.2		2 to 40 pos. avail. per row
E	2.00 x No. of position per Row	
F	2.00 x No. of position per Row - 2.00	

 HO CHIEN ENTERPRISE CO. LTD	
TITLE : 0.078" (2.00mm) PIN HEADER STRAIGHT	
PAGE: 1 OF 1	HO CHIEN PIN NO. 2524-1X □□ G7.6

DR: RON CHEN	CHK: J.T.CHEN	APPD: C.Y.LIN
--------------	---------------	---------------