


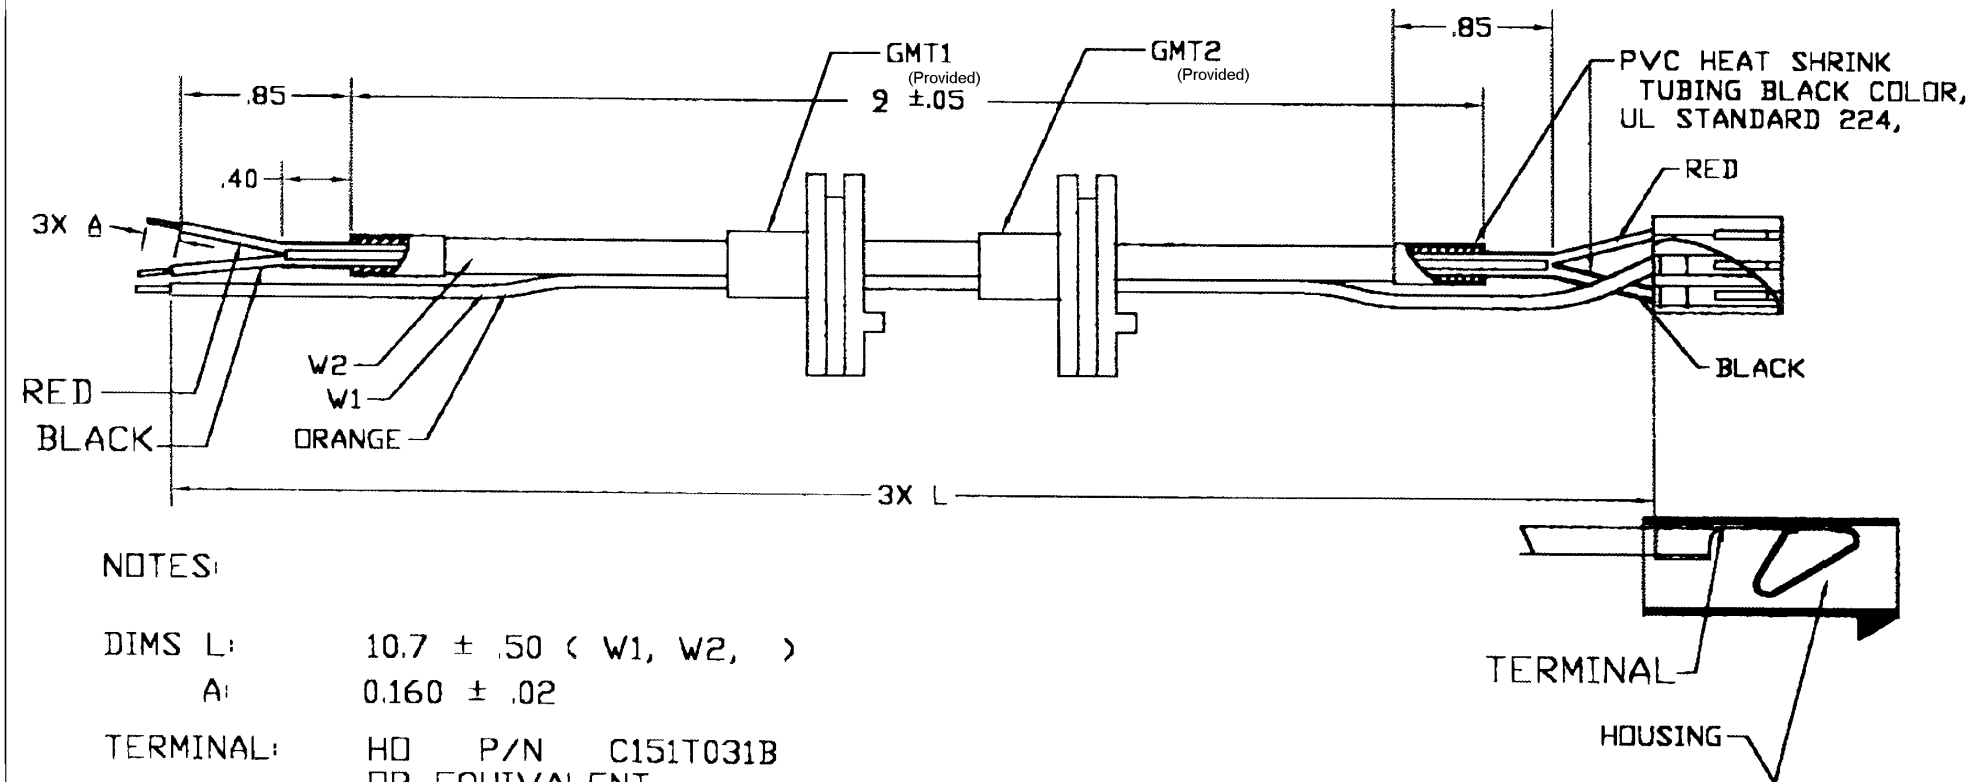

NOTES:

DIMS L: 10.7 ± .50 (W1, W2,)
A: 0.160 ± .02

TERMINAL: HO P/N C151T031B
OR EQUIVALENT.

HOUSING: HO P/N C15103S OR EQUIVALENT.

W1: CONDUCTOR: 18 AWG
INSULATION: PVC
COLOR: ORANGE
VOLT RATING: 300V

W2: THREE WIRE CABLE,
CONDUCTOR: 22 AWG
INSULATION: PVC BLACK
COLOR: RED/BLACK
VOLT RATING: 300V
UL STANDARD 2464 / CSA VW-1SC

GMT1 & GMT2: P/N ME-G83970 GROMMET,
(FRIENDSHIP #84135 REV 5) OR EQUIVALENT.
(ADD GMT1 AND GMT2 2M522 WT.)

UNLESS OTHERWISE SPECIFIED DIMENSION ARE Inch TOLERANCES ARE 0.XXX ± .005 0.XX ± .010 ANGLES ± 0.5°		HO CHIEN www.hochien.com	
FILENAME: MS-S58465-000522		HARNESS, G83970, SNUB/GATE MS-S58465	
DRAWN: W T. 991108	SIZE: A	DRAWING NO: 83970-ASS	REV: 1
CHECKED: APPROVED:	THIRD ANGLE PROJECTION	SCALE: DO NOT SCALE DRAWING	SHEET: 1 OF 1