


Tooling No.	Type
Head(in)	
Head(out)	
Core	
SR	

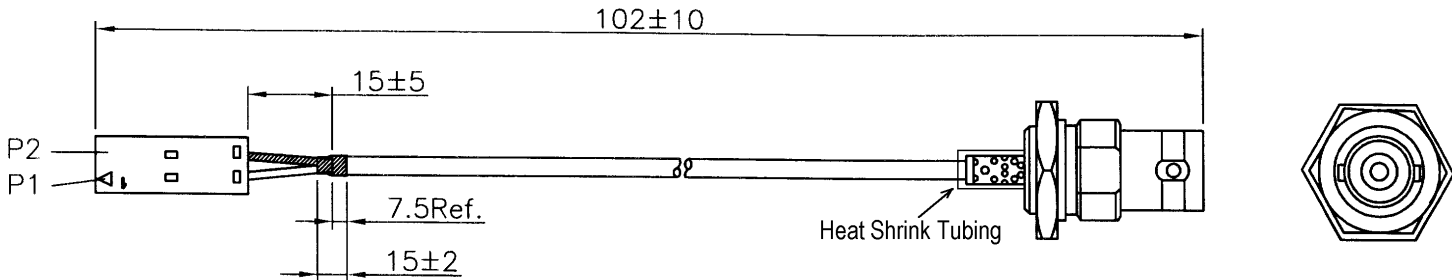

WIRING SCHEME:

Housing	2P	Wire color	BNC Female
P2	Shield	Open Circuit, Baided striped back - No connect to BNC, Heat Shrink Tubing over.	
P1	(Option)	Center	

NOTES:

- 1.CABLE: Any shield cable 28AWG or RG58U ...
- 2.HOUSING: HO CHIEN PN# 2550-1X2
- 3.TERMINAL: HO CHIEN PN# 2550-10GT
- 4.CONNECTOR:BNC female,bulkhead HO CHIEN PN# BNC-1341-50-DGN (Amphenol PN# 112575)
- 5.H/S TUBE:Black (UL APPROVED)
- 6.Molding Materail:BLACK PVC.

	D	BNC Conn. from panel mount type to bulkhead Solder type	06/07/'04
	C	BNC Conn. from male to female type	05/28/'04
	B	Add BNC plug and change cable structure	05/14/'04
AREA	REV.	DESCRIPTION	DATE

HO CHIEN					
PART NO.	CA-C4113-0002			DATE	12/6/04'
DRAWING NO.		REV.	E	DRAWN	Luomi
CUSTOMER P/N		SCALE	NON	CHECKED	Jane
TOLERANCE	.X ±0.5 .XX ±0.2	UNIT	mm	APPROVED	Sail