


SPECIFICATIONS:

1. CONTACT RESISTANCE : 20m OHM MAX.
2. INSULATION RESISTANCE : 100M OHM AT 500V D.C.
3. VOLTAGE WITHSTANDING : AC 500V 1 MINUTE
4. INSERTION FORCE : 5.0KG MAX.
5. WITHDRAWAL FORCE : 1-3.5 KG
6. LIFE TEST : 5,000 CYCLES MIN. AFTER TESTING, CONTACT RESISTANCE SHALL NOT EXCEED 100m OHM
7. CURRENT RATING : AC: 100V 2A
DC: 24V 1A

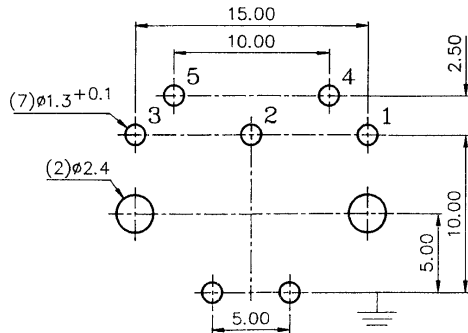

MOUNTING HOLE
(TOP VIEW)

4.	CONTACTOR	5	BSR-H/2 0.7t	Sn	
3.	PLATE	1	BAKELITE	PL-PEM 1.4t	
2.	EARTH TERMINAL	1	PBSR-H 0.2t	Sn	
1.	BODY	1	P.B.T.		UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS
REVISION	APPROVAL BY	CHECKED BY	DRAWD BY	UNITS	
	<i>gwen</i>	<i>So 97.01.04</i>	<i>ling</i>	<i>97.01.04</i>	<i>mm</i>
	PROJECTION	PRODUCT	DRAWING NO.	SCALE	
		5PIN-180° DIN-CONNECTOR	DS-025	4/1	