

Ordering Information:




2540-EX-XX
 1 2 3

1:Part No.

2:Material:

- 2 = Red 22 AWG(UL94V-2)
- 4 = White 24 AWG (UL94V-2)
- 6 = Blue 26 AWG(UL94V-2)
- 8 = Green 28 AWG(UL94V-2)

3: XX : Position (02 ~ 24)

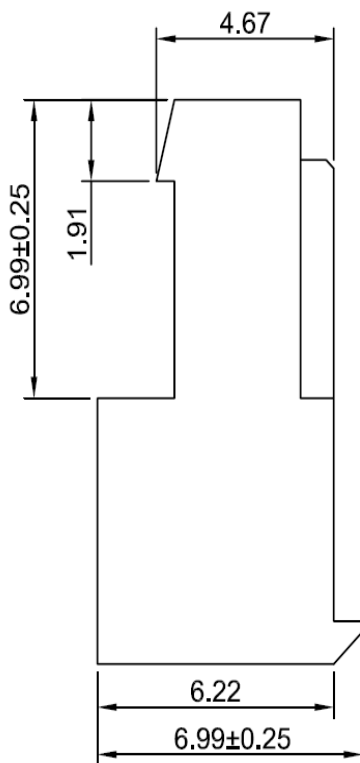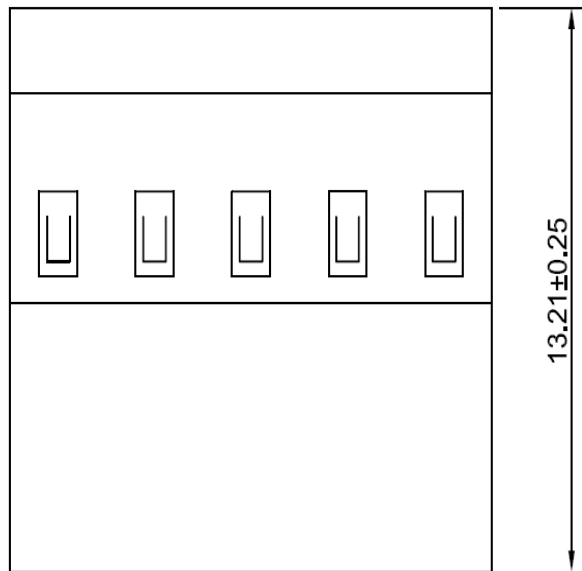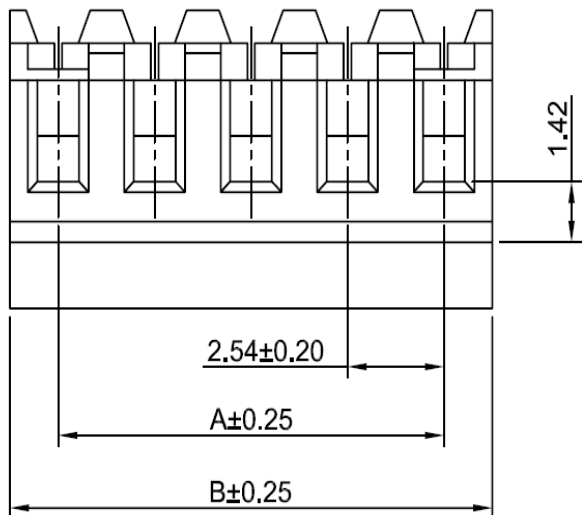

SPECIFICATIONS:

- Current Rating: 3A AC,DC
- Voltage Rating: 250V AC,DC
- Temperature Range: -40°C ~ +105°C
- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 1500V AC/minute
- Housing Material: Nylon66 UL 94V-2 or UL94V-0
- Terminal Material: Phosphor bronze/Tin over Nickel

Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2540-EX-02	2.54	5.08	2540-EX-14	33.02	35.56
2540-EX-03	5.08	7.62	2540-EX-15	35.56	38.10
2540-EX-04	7.62	10.16	2540-EX-16	38.10	40.64
2540-EX-05	10.16	12.70	2540-EX-17	40.64	43.18
2540-EX-06	12.70	15.24	2540-EX-18	43.18	45.72
2540-EX-07	15.24	17.78	2540-EX-19	45.72	48.26
2540-EX-08	17.78	20.32	2540-EX-20	48.26	50.80
2540-EX-09	20.32	22.86	2540-EX-21	50.80	53.34
2540-EX-10	22.86	25.40	2540-EX-22	53.34	55.88
2540-EX-11	25.40	27.94	2540-EX-23	55.88	58.42
2540-EX-12	27.94	30.48	2540-EX-24	58.42	60.96
2540-EX-13	30.48	33.02			

Unit: mm

HO CHIEN www.hochien.com			Title : 2.54mm IDC Closed End IDC Connecto	
Unit	Scale	Sheet		
mm	1:1	1 of 1	DRAW NO : 2540-EX-XX	
Draw BY: Ylnzhjpeng		Approved : GONGYB		
General Tolerance			REV A0	
x.x≤0.25		ANGLE±		
x.xx≤0.20		⊕		
x.xxx≤0.15		⊕		

REV	DESCRIPTION	DATE
AO	NEW RELEASE	2010.01.21