





**SPECIFICATION :**

**1. Electrical Char.**




- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

**2. Physical char.**

- Housing : PBT Glass Filled (UL 94V-0)
- Color : Black Color
- Spring Wire : 0.35mm Thickness Phosphor Bronze  
Nickel Plated and with 50u Gold Plated.
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

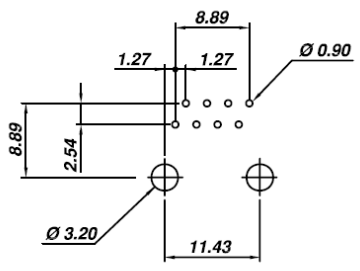

**PCB LAYOUT**  
(Top View)

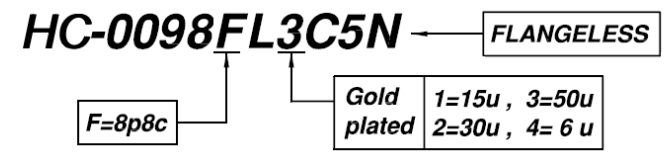

**HO CHIEN**  
www.hochien.com

TITLE  
**RJ45 SIDE ENTRY Cat.5 PCB JACK**  
UL & cUL FILE NO. E131820

**MODULAR JACKS ASSY FOR  
HC-0098FL3C5N**

SCALE SIZE DWG. NO. 9638 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. <i>Steven</i>	DATE MAR-01 '06
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	CK'D <i>Johnn</i>	MAR-01 '06
$\frac{MM}{INCH}$	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D <i>Billy</i>	MAR-01 '06

DWG. NO.  
**AS009002-2**