
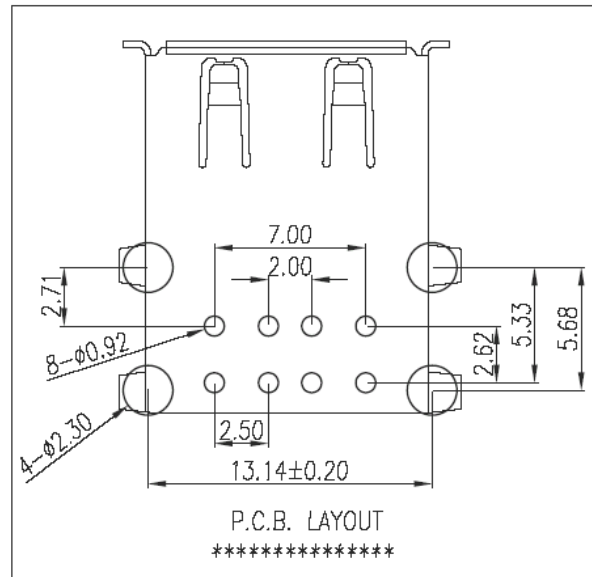
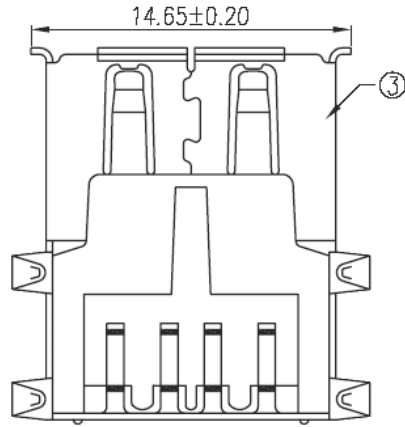
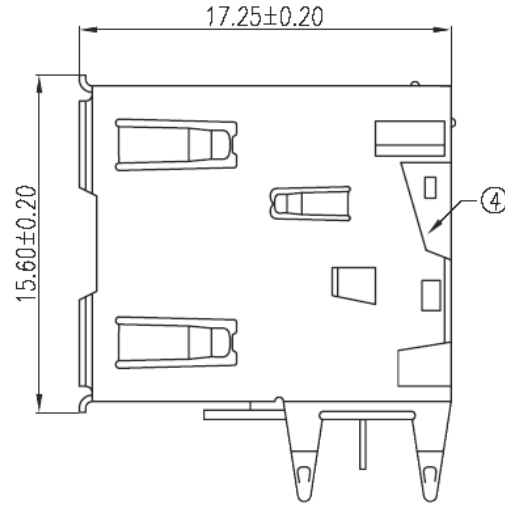


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

Specification:

1. Rated voltage and current: 1A Max.
2. Dielectric withstanding voltage: 30V(ac) for 1 minute.
3. Contact resistance: Before life test 30m ohm Max.  
After life test 50m ohm max
4. Insulation resistance: 1000M ohm Min at DC 500V.
5. Insertion force: 35 Newtons Max.
6. Extraction force: 10 Newtons Min.
7. Solderability: Terminal shall be immersed in flux before test, Then dip in molten solder for 5±0.5 sec. At 245±5°C
8. Temperature range: -55°C~+85°C

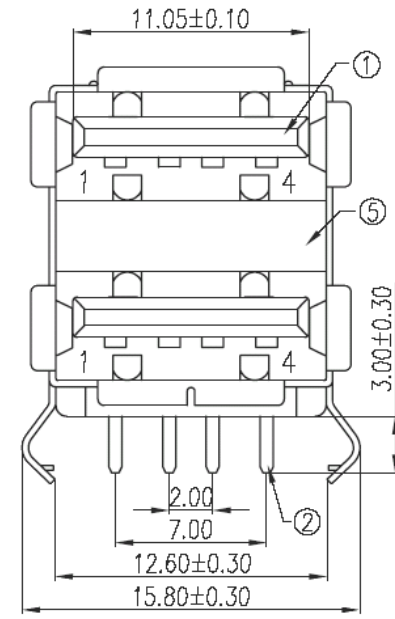

5	Spring	1	SUS	T=0.20mm	NO
4	Back Shell	1	SPCC	T=0.30mm	80~120u"Nickel Plated
3	Front Shell	1	Brass	T=0.30mm	80~120u"Nickel Plated
2	Contact	8	Brass	T=0.25mm	Contact area:0.8~1.2u" Gold Plated over 40u"Nickel min. Solder area:80~120u" Tin Plated over 40u" Nickel min.
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:		<b>www.hochien.com</b>	
MODEL NO:		FINSH:			
UNIT: mm	SIZE: A4	COLOR:			
TOLERANCE UNSPECIFIED		DR: 李霞 '06/04/03		USB B STACK FEMALE - FEMALE RIGHT ANGLE, SHIELD	
.x	±0.30	CHK: Kevin '06/04/03			
.xx	±0.20	PART NAME: USB A4F01012W05			
.xxx	±0.10	APP: Kent '06/04/03		REVISION: AO	SCALE: 1:1
ANG.	±1°			SHEET: 1 of 1	

ROHS Compliant