RoHS Compliant

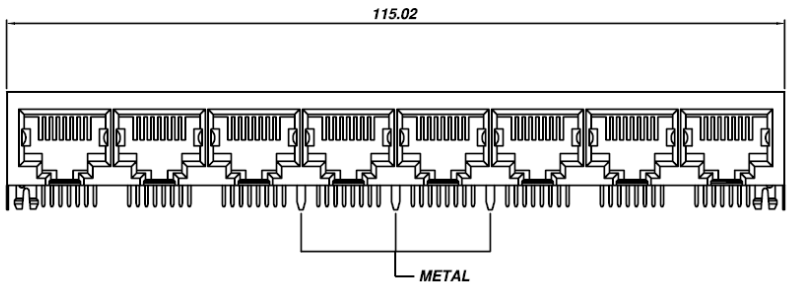



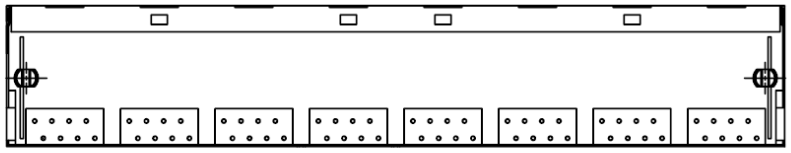

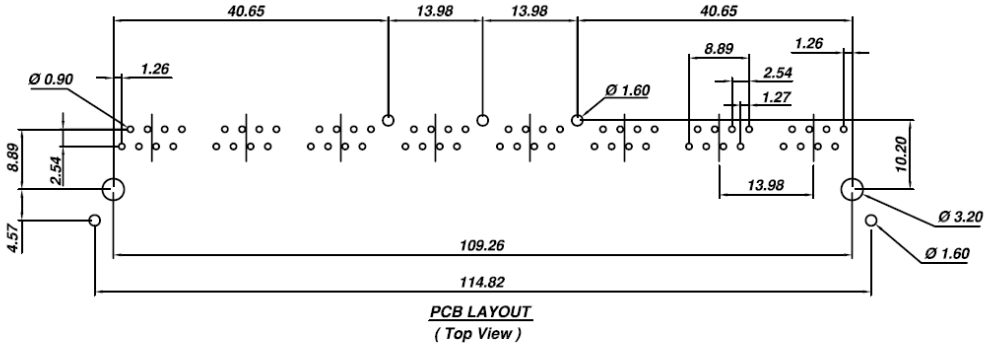

PCB LAYOUT
(Top View)

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC.
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)
Color : Black Color
Spring Wire : 0.35mm Thickness Phosphor Bronze
Gold Plating Over Nickel
Temperature Range : - 40°C / +85°C
Durability : 500 Mating cycles Min.

7600-088-18-3A

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. Steven	DATE MAR-01 '06
THIRD ANGLE PROJECTION	LINEAR MM / INCH	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	CK`D Johnn	MAR-01 '06
MM / INCH	ANGLE +0°30'	RADIL	+0.45 -0.15	APP`D Billy	MAR-01 '06

DWG. NO. **AS041020-1**

HO CHIEN
www.hochien.com

TITLE
1x8 8POSITIONS
SIDE ENTRY SHIELDED PCB GANG JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
7600-088-18-3A

SCALE SIZE DWG. NO. 9638-S SERIES