




SPECIFICATION :

1. Electrical Char.


Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC.
 Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.


Housing (Option) :
 PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 Nylon (UL 94V-0), Soldering Temperature:260°C
 Color : Black Color
 Spring Wire :
 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
 Temperature Range : - 40°C / +85°C
 Durability : 500 Mating cycles Min.

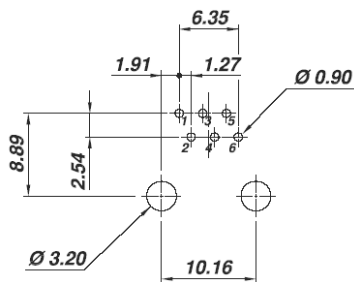

PCB LAYOUT
(Top View)



HC-019-6A-X-XX

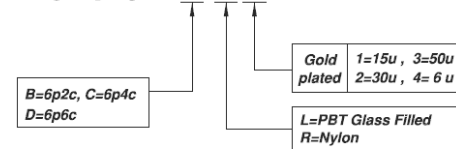

HO CHIEN

www.hochien.com

TITLE

Very low profile Side Entry PCB Jack
 UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
HC-019-6A-X-XX

SCALE SIZE DWG. NO. 9695 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR	MM	.00±0.01	Steven	JUL-01 '08
		INCH	.000±0.005	CK'D	
MM	ANGLE +0°30'	RADIL	.000±0.13	John	JUL-01 '08
			INCH	.0000±0.002	APP'D
			+0.45	Billy	JUL-01 '08
			-0.15		

DWG. NO.

AST019004-1