


REV	E.C.O.	DATE
-	RELEASE	1/26/07
A	#4168	3/22/07

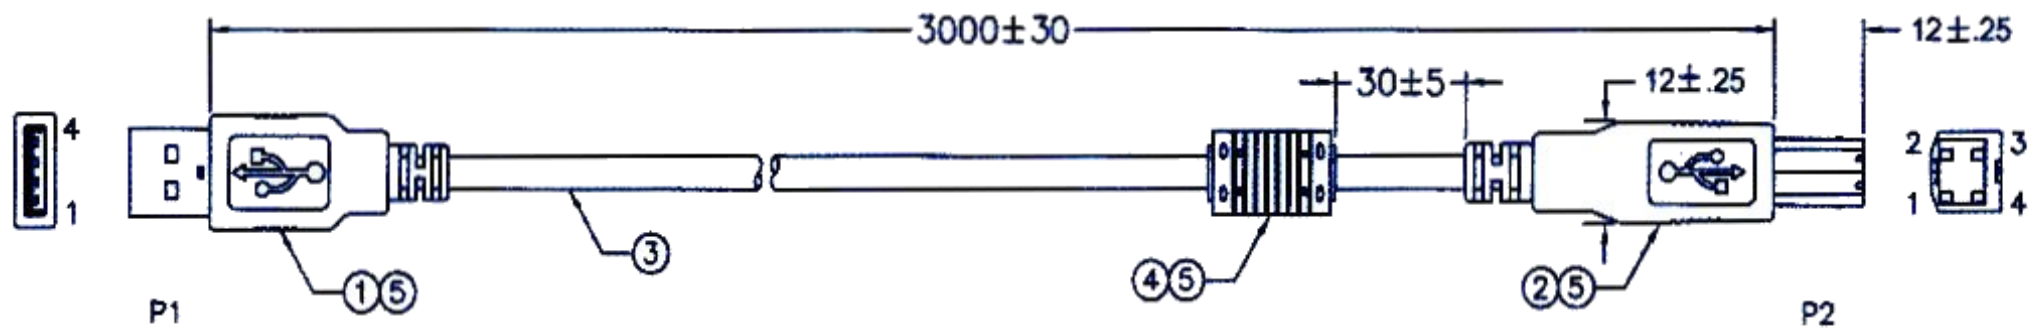

PIN OUT:

P1		P2
1	red(20awg)	1
2	white(28awg)	2
3	green(28awg)	3
4	black(20awg)	4
shell	braid+drain	shell

ITEM	PART NO.	DESCRIPTION	REMARK
1	5075A-02-02-30-F1	USB A SOLDER TYPE MALE TERMINAL GOLD 30U"	1
2	5075B-02-02-30-F1	USB B SOLDER TYPE MALE TERMINAL GOLD 30U"	1
3	810B-1P2C2820B5.0BK 3-M	UL 2725 28AWG*1P+20AWG*2C+AEB OD:5.0MM COLOR:MATTE BLACK (2.0REV)	1
4	828A-R14.2*28.5*6.7	FERRITE CORE OD*H*ID=14.2*28.5*6.7MM	1
5	827-PVC-50P-BK	PVC MOLDING COLOR:BLACK	

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS NOTED OTHERWISE.

CABLE LENGTH:
3 METERS
RoHS COMPLIANT

APPLY APPROPRIATE LABEL
(1073-150) TO BAG.

MATERIAL:	ASSEMBLY	DRAWN BY:	M. ABRAMOVICH	01/25/07	HO CHIEN www.hochien.com PN# CA-B2045-0004
TOLERANCES UNLESS OTHERWISE SPECIFIED		APPROVED BY:		2260-150	
FRACTIONAL: ±1/64		ENG:	<i>H. G. G. G. G.</i>	3/20/07	
2 PLC DEC.: ±.01		MFG:	<i>F. G. G. G.</i>	3/21/07	
3 PLC DEC.: ±.005		QA:	<i>R. G. G. G.</i>	3/22/07	TITLE: USB A/B 3M BLACK CABLE W/FERRITE