


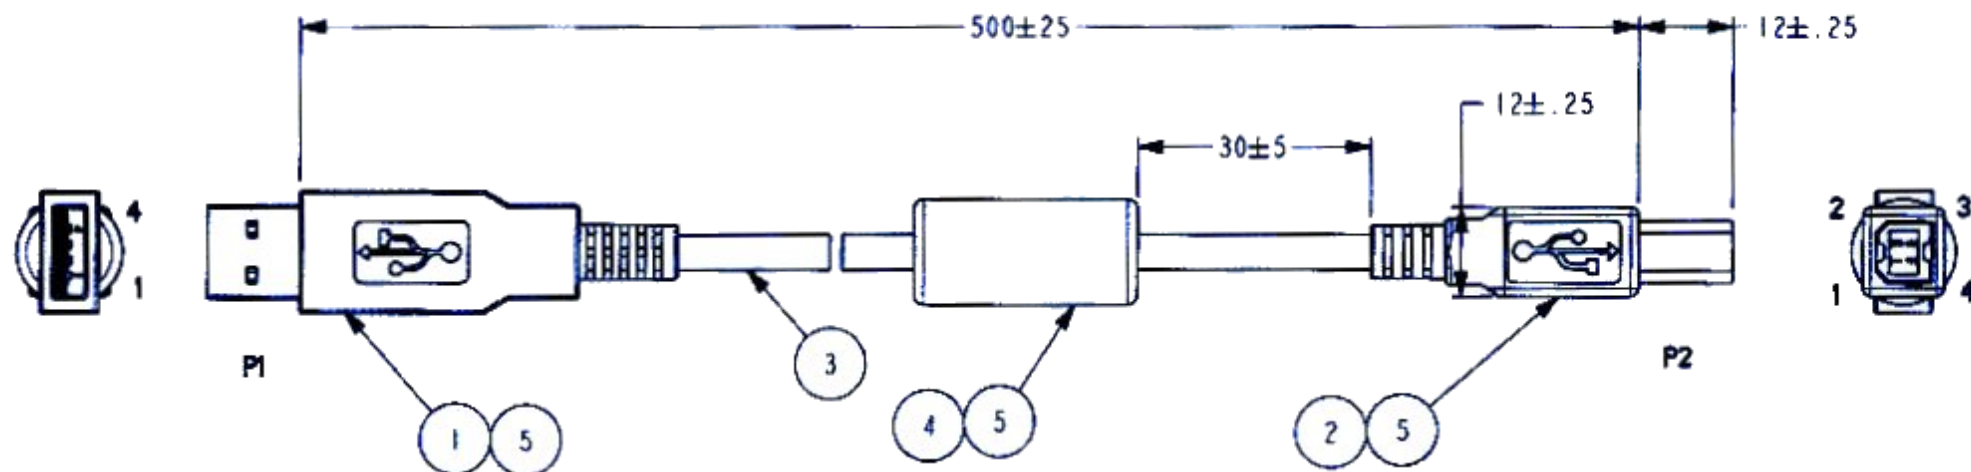

PIN OUT:

P1		P2
1	red(20awg)	1
2	white(28awg)	2
3	green(28awg)	3
4	black(20awg)	4
shell	braid+drain	shell

ITEM	PART NO.	DESCRIPTION	REMARK
1	5075A-02-02-30-F1	USB A SOLDER TYPE MALE TERMINAL GOLD 30U"	1
2	5075B-02-02-30-F1	USB B SOLDER TYPE MALE TERMINAL GOLD 30U"	1
3	810B-1P2C2820B5.0BG3	UL 2725 28AWG*1P+20AWG*2C+AEB OD:5.0MM COLOR: MATTE BLACK (2.0 REV)	1
4	829A-R14.2*28.5*6.7	FERRITE CORE OD*H*ID=14.2*28.5*6.7MM	1
5	827-PVC-45P-BK	PVC MOLDING. COLOR: BLACK	

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS NOTED OTHERWISE.

CABLE LENGTH: 0.5 METERS

RoHS COMPLIANT.

APPLY LABEL 1031-132 TO THE BAG.

MATERIAL:		DRAWN BY:	A. ROYZEN	7/23/08	HO CHIEN www.hochien.com PN# CA-B2045-0007 TITLE: USB A/B 0.5M BLACK CABLE W/FERRITE 2270-152
TOLERANCES UNLESS OTHERWISE SPECIFIED		APPROVED BY:			
FRACTIONAL: ±1/64		ENG:	<i>A. Black</i>	8/12/08	
2 PLC. DEC.: ±.01		MFG:	<i>122</i>	8/12/08	
3 PLC. DEC.: ±.005		QA:	<i>122</i>	8/12/08	