DESCRIPTION: COMMU	DESCRIPTION: COMMUNICATIONS CABLE, DB9M (male) TO DB25M (male)					
DB9M CONNECTOR:	SUB-MIN 9 PIN, GOLD FLASH CONTACTS, WITH MOLDED SHIELDED STRAIN RELIEF AND 4-40 UNC MOLDED					
DB25M CONNECTOR:	THUMBSCREWS OR SLOTTED JACKSCREWS. SUB-MIN 25 PIN, SELECTIVE GOLD FLASH CONTACTS, WITH MOLDED SHIELDED STRAIN RELIEF AND 4-40 UNC MOLDED					
	THUMBSCREWS OR SLOTTED JACKSCREWS.					
CABLE: CABLE ASSY LENGTH:						
MARKING:	SHALL BE PERMANENTLY AND LEGIBLY MARKED WITH THE EATON CORP. PART NUMBER, 152601976-001, AND REVISION (Brady type label acceptable).					
CONN. MARKING:	DB9 SHALL BE MARKED P24, DB25 SHALL BE MARKED UPS.					
MOLDING MATERIAL A	ND CABLE JACKET COLOR: BLACK					


RoHS COMPLIANCY (Restriction of Hazardous Substances)

- 1) MATERIAL/COMPONENT SHALL MEET RoHS REGULATIONS per Eaton RoHS spec 164080496.
- 2) BULK PACKAGING SHALL INDICATE CONTENTS ARE ROHS COMPLIANT.
- 3) DOCUMENTATION INDICATING MATERIAL/COMPONENT IS RoHS COMPLIANT (certificate of compliance, material analysis, etc) SHALL BE AVAILABLE UPON REQUEST.

PACKAGING: EACH CABLE SHALL BE COILED AND TIED (approximatily 5 inch coil), AND PLACED IN A CLEAR POLY BAG LABELED WITH <u>152601976-001</u>. LABEL SHALL BE WHITE WITH BLACK LETTERING.

	APPROVED MANUFACTURER	S
PART NUMBER	Ho Chien electronic Group Inc.	
152601976-001	CA-B4057-0002	

ELECTRICAL CONNECTIONS:

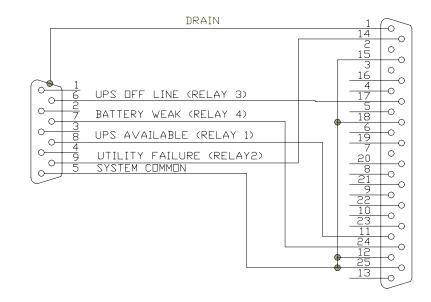

HO CHIEN Electronics Group Inc. PN#CA-B4057-0002											
Description:	COMM	CABLE DB9M	/ DB25M 30F	Т							
Project:			Format:	MS Word	Subclass:	CON	IPONEN	Т			
Created By:	L. FRANZEN	Creation Date:	05/25/2006	Modified By:		Modific Date:	ation				
Revision:	A00	ECN Number:	069-2028	Status: RELE	ASED	Size:	AV				
Object ID:	152601976					Sheet:	1	of	1		
				TY OF HO CHIEN ELECTRO NUFACTURE OR SALE OF							