


Note:

1. Use AWG24 for all wire (don't use twisted pair)

Non - Shield Cable


2. Use any color for jumper

Item	Part No.	QTY.	Remarks
1	02-03-20090	1	9 POS. Female D-Sub
2	HD-9	1	Plastic D-Sub Cvr 4/40SC
3	XPH-7	1	JST Housing
4	SXH-001T-P0.6	6	YC-69 or MK-DS SXA/M001-06
5	882208	5.25 FT.	8C/22
6	163-0300	1	Mouser or Equiv.
7		1 IN.	Shrink Tube
8	C6348	.83 FT.	2C/22

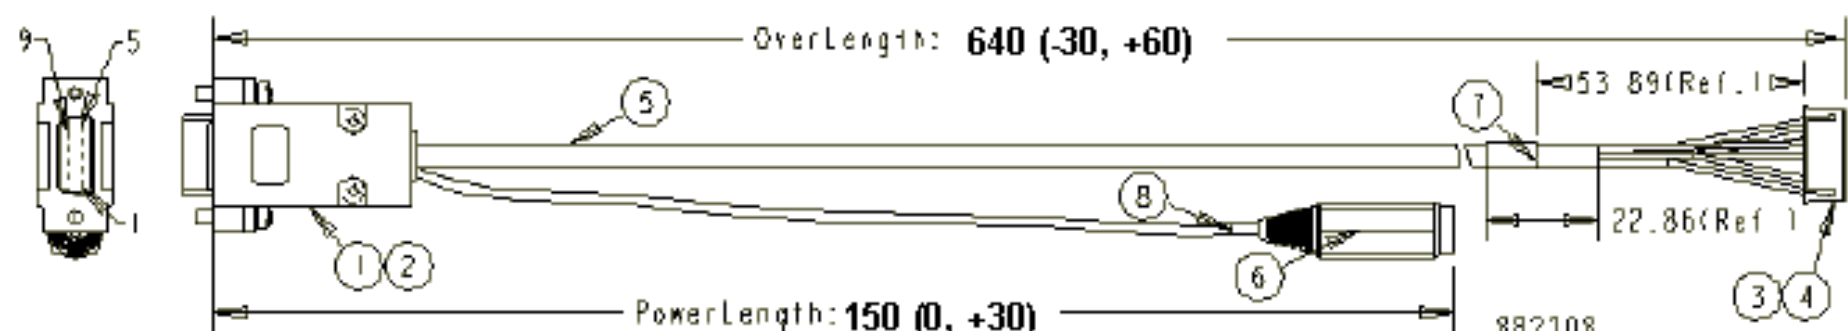

**SCREW TYPE HOOD
NOT SNAP TYPE HOOD**

WIRING:

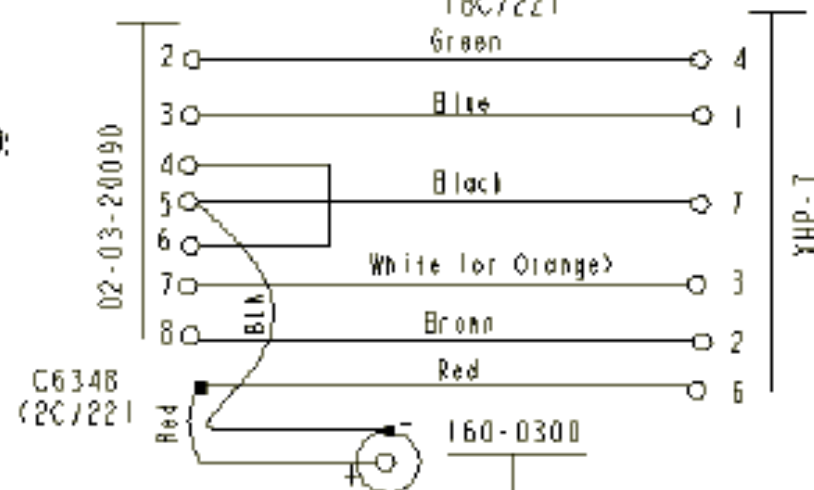

REVISIONS			 THIRD ANGLE PROJECTION	UNIT	mm	CAD FILE NO.	NTC-04-0007	R232 Cable with Power for Model 3000				
				UNLESS OTHERWISE NOTED, ALL LINEAR TOLERANCES ARE $\pm 1, \pm 2$		HO CHIEN		PART NO.	CA-B6070-0038			
								DRN	SK	DATE	8/29/03	
								CHN	GC	DATE		