

4






3

2

1

REVISIONS

REV	DESCRIPTION	BY	DATE	APPROVED
01	INITIAL RELEASE PER XCN X-6714	ERW	08/18/09	

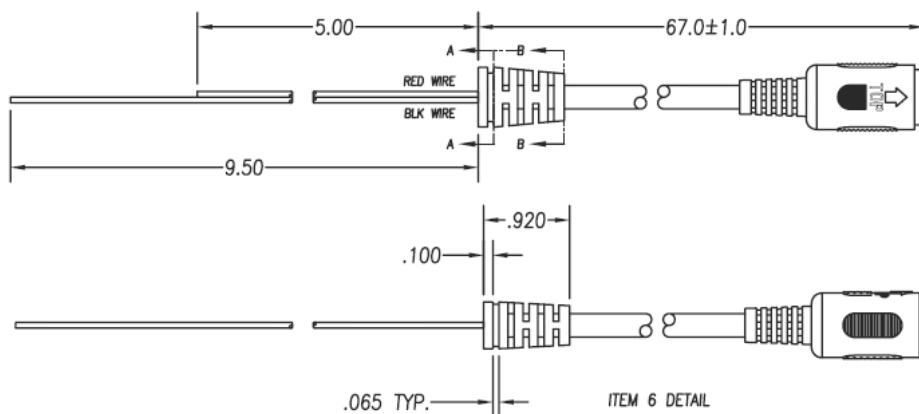

ITEM 6 DETAIL


SECTION A_A

DETAIL B


DETAIL B
(PIN LAYOUT)
SCALE: 4.0

NOTES AND SPECIFICATIONS

1. ALL WIRE CONNECTIONS TO BE ORIENTED AND SOLDERED IN POSITION AS SHOWN IN VIEWS.
2. MOLDED CABLE SHALL CONSIST OF MOLDED-IN STRAIN RELIEF AND 5 POSITION DIN RECEPTACLE. COLOR: WHITE
3. SHRINK WRAP LEADS AS SPECIFIED
4. CERTIFICATE OF COMPLIANCE REQUIRED.
5. SUPPLIER: 100585

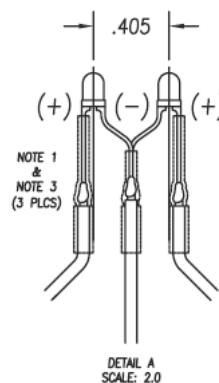

WIRE LIST		
WIRE #	MATERIAL ITEM #	LENGTH
1A	9	5.75
1B	9	3.00
1C	9	3.00
2A	8	6.00
2B	8	2.00
3	8	4.50
4	8	5.50
5A	8	6.00
5B	8	3.25
6A	8	3.00
6B	8	2.00
7	8	2.25

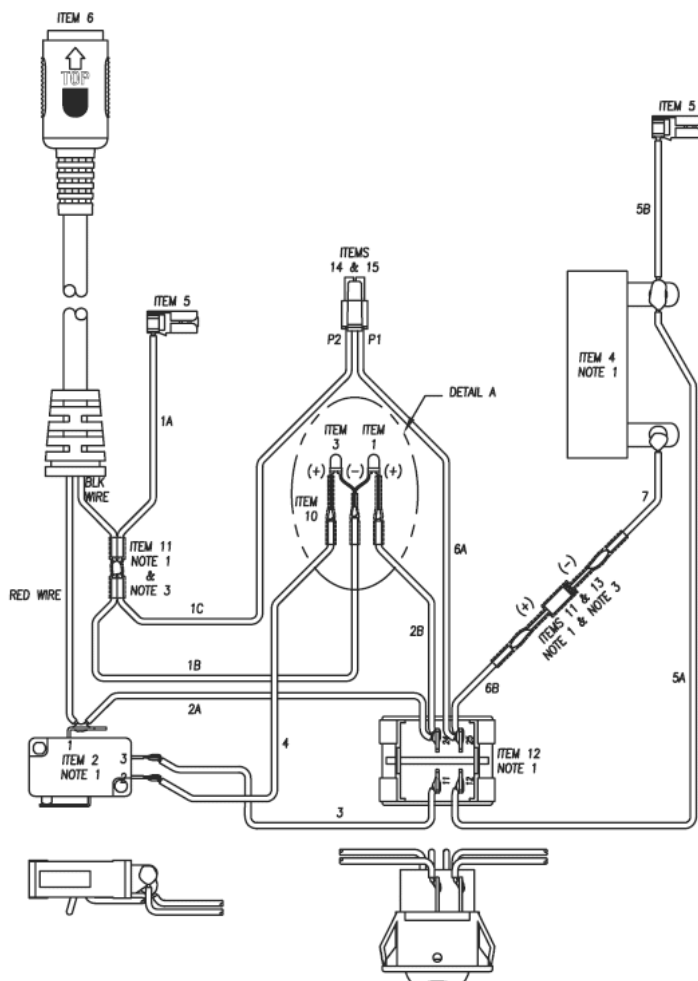


	2	EA	15	4584-01	CONNECTOR PIN, FEMALE TYCO# 794610-1
	1	EA	14	4585-01	CONNECTOR HOUSING, RECEPTACLE TYCO# 1445022-2
	1	EA	13	4579-01	ZENER DIODE, 3.3 VOLT 1N5333B
	1	EA	12	4543-02	ROCKER SWITCH, GRAY CW# GR-2023B-1001
	AR	EA	11		3/16" SHRINK TUBE, CLEAR POLYOLEFIN
	AR	EA	10		3/32" SHRINK TUBE, CLEAR POLYOLEFIN
	11.75	IN	9		20 AWG, BLK, TEFLON INSULATED
	34.50	IN	8		20 AWG, RED, TEFLON INSULATED
	1	EA	6		MOLDED CABLE HO-CHEN CA-BC019-0001C
	2	EA	5		QUICK CONNECTOR, 90°, MOLEX 0190090012
	1	EA	4		RESISTOR, 25W 1 OHM FV125-1.0
	1	EA	3		LED, RED DIGI-KEY P/N 67-1067-ND LUMEX SSL-LX3044ID-12
	1	EA	2		SWITCH, MICRO, ZIPPY VMN-030-01A0-B1-Z
	1	EA	1		LED, GRN DIGI-KEY P/N 67-1061-ND LUMEX SSL-LX3044GD-12
	-01	U/M	ITEM		
QUANTITY FOR PART DASH NO.				COMPONENT PART NO.	DESCRIPTION

BILL OF MATERIALS FOR 4576-01

4576-01		EA		EA	WIRING HARNESS, THROMCAT 6F
PART NUMBER	SAC	BOM	SALES	PURCH	DESCRIPTION (25 Char. Max.)
MATERIAL:		UNIT OF MEASURE (U/M)		PROJECT THROMCAT 6F	
FINISH:		DRAWN BY MJF		HO CHEN	
CONFIDENTIAL & PROPRIETARY INFORMATION OF		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ON		TITLE WIRING HARNESS THROMCAT 6F	
NOT TO BE REPRODUCED OR USED IN ANY MANNER OTHER THAN WITH THE EXPRESS WRITTEN PERMISSION OF KENNEY NASH CORPORATION.		2 PLACE 3 PLACE 4 PLACE DECIMALS DECIMALS DECIMALS ANGLES		CODE IDENT. SIZE DWG. NO.	
		±.01 ±.005 ±.0001 ±.5°		AC14 C CA-BC019-0004	
		SURFACE FINISH .43/ OR BETTER REMOVE ALL BURRS AND BREAK ALL SHARP EDGES		REV. 01	
				SCALE: NONE FORM 2402 Revision B SHEET 1 OF 2	

REVISIONS				
REV	DESCRIPTION	BY	DATE	APPROVED
01	SEE SHEET 1	ERW	08/18/09	

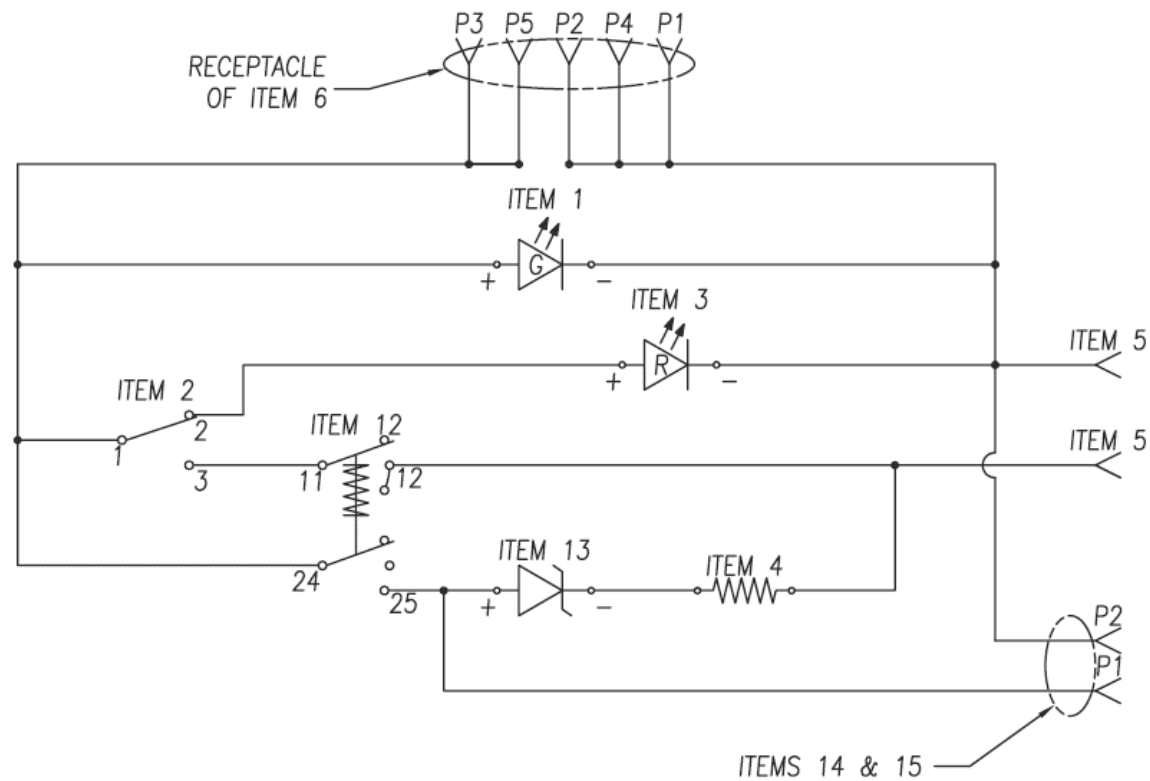

4576-01		EA		EA	WIRING HARNESS, THROMCAT 6F	
PART NUMBER	SAC	BOM	SALES	PURCH	DESCRIPTION (25 Char. Max.)	
MATERIAL:		UNIT OF MEASURE (U/M)			HO CHIEN	
FINISH:		PROJECT THROMCAT 6F			TITLE	
CONFIDENTIAL & PROPRIETARY INFORMATION OF KENSEY NASH CORPORATION		DRAWN BY MJF			WIRING HARNESS THROMCAT 6F	
NOT TO BE REPRODUCED OR USED IN ANY MANNER OTHER THAN WITH THE EXPRESS WRITTEN PERMISSION OF KENSEY NASH CORPORATION.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (MM) TOLERANCES ON			CODE IDENT. SIZE DWG. NO.	
		2 PLACE 3 PLACE 4 PLACE ANGLES DECIMALS DECIMALS DECIMALS ±.01 ±.005 ±.0001 ±.5°			AC14 C CA-BC019-0004	
		SURFACE FINISH R ₁ /OR BETTER REMOVE ALL BURRS AND BREAK ALL SHARP EDGES			REV. 01	
		SCALE: NONE			FORM 2402 Revision B SHEET 2 OF 2	