


NOTES:

- 1.0 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2.0 WIRE INSULATION MUST BE UL STYLE 20462 OR UL STYLE 2651
WITH A TEMPERATURE RATING OF 80°C OR HIGHER. ALL CONDUCTORS
ARE TO BE 26 AWG. MARKING ON WIRE IS OPTIONAL.
3.0 STRIPPED ENDS ARE TO BE TINNED DIPPED WITH LEAD FREE SOLDER
4.0 P1 CONNECTOR MUST MATE WITH JST PCB HEADER P/N B06B-PASK

REVISIONS					
REV	ZONE	CHANGE DESCRIPTION	DATE	ECN NO.	APPROVED
AA	N/A	RELEASED FOR PRODUCTION	12-DEC-08	C0800214	Y. BRATCHER

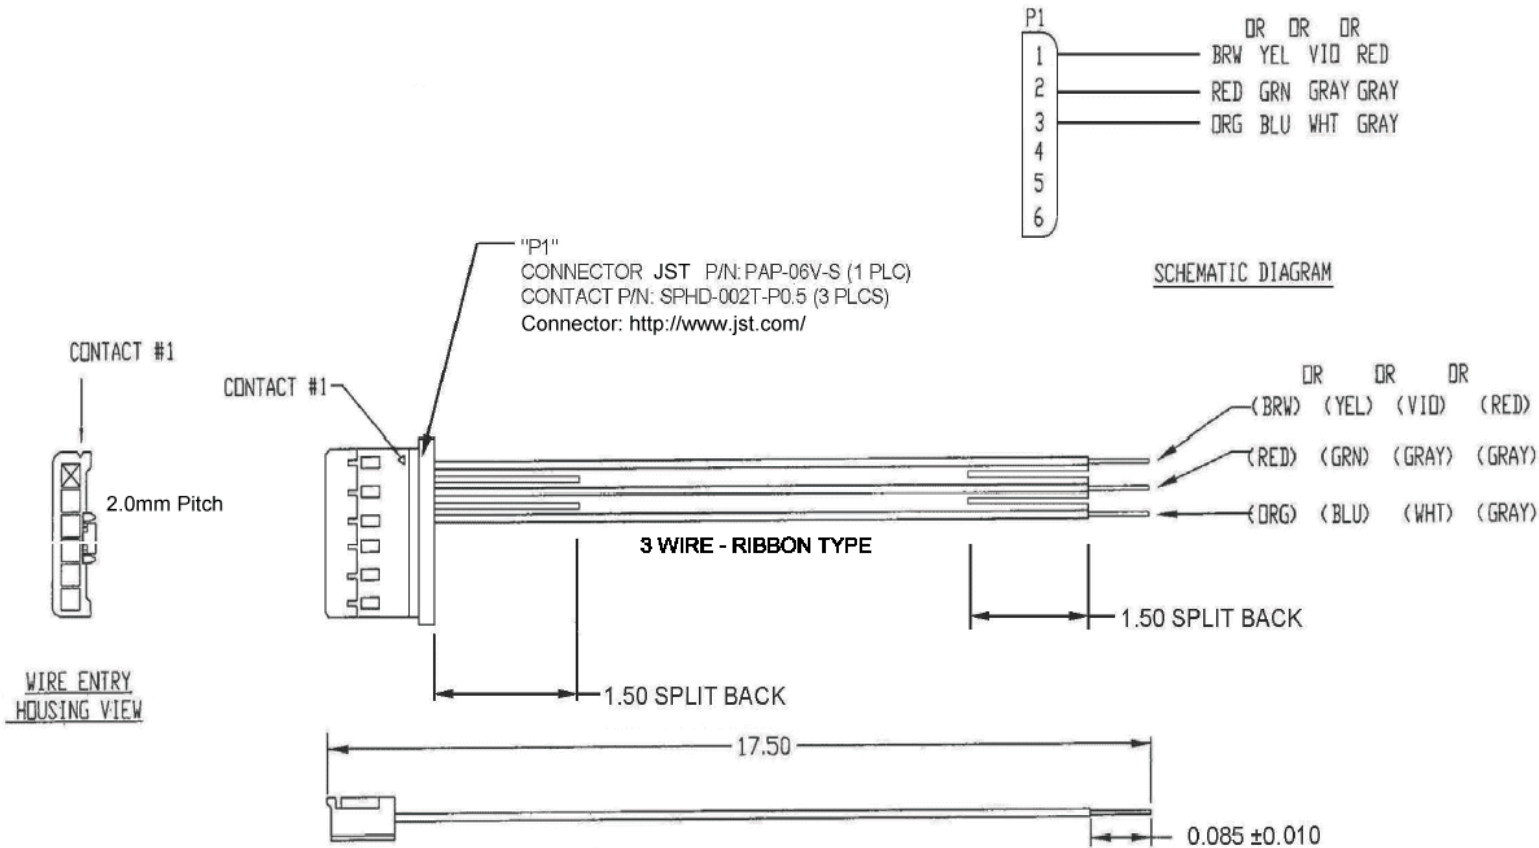

PART NUMBER C203200019A		METRIC		DO NOT SCALE DRAWING. DIMENSIONS ARE IN MILLIMETERS. DIMENSIONING AND TOLERANCING PER ASMT 114, DN - 1992.	
UNLESS OTHERWISE SPECIFIED TOLERANCE ON		ONE PLACE (0.0)		±0.30(±0.012)	
TWO PLACE (0.00)		±0.35(±0.250)		ANGULAR	
COMMERCIAL TOLERANCES APPLY TO STOCK SIZES.		THIRD ANGLE PROJECTION		CAD DOCUMENT, MANUAL REVISIONS NOT ALLOWED.	
QUALITY APPROVAL		DATE		TITLE	
D. GONZALEZ		30-JUN-08		HSG, 6POS, -FCBL, 26AWG, 3CON-STRIP-17.50"	
ENGINEERING APPROVAL		DATE		SIZE	
Y. BRATCHER		30-JUN-08		A2	
DRAWN BY		DATE		DWG NO.	
Y. BRATCHER		30-JUN-08		CA-C1342-0001	
SCALE		N/A		SHEET	
1 OF 1				REV	
				AA	