


REVISION LIST		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE OF DWG	05.09.2007

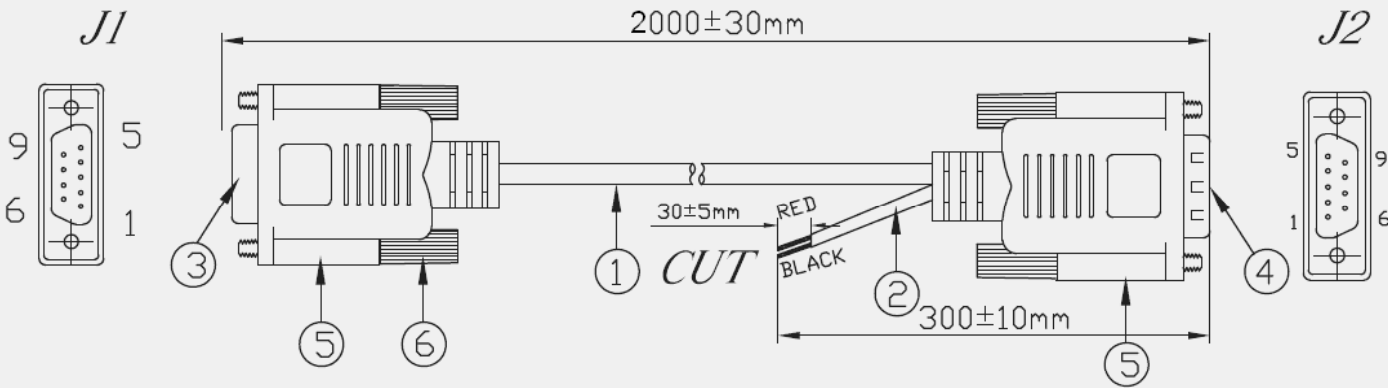

NOTE:

- 1. TEMPERATURE RANGE FOR THE CABLE SHOULD BE BETWEEN -20°C AND +85°C.
- 2. THE END RED AND BLACK WIRES BE CUT STRIPPING TINNING.


BILL OF MATERIAL

⑥	THUMB SCREW: UNC#4-40,AG4*24.0, BLACK COLOR MOLDING.	4 pc	CC016
⑤	45P PVC, BLACK COLOR.	32.0g	CC001
④	D-SUB 9P MALE SOLDERING TYPE. INSULATION: PBT, BLACK COLOR. CONTACT: BRASS, GOLD FLASH.	1 pc	CB001
③	D-SUB 9P FEMALE SOLDERING TYPE. INSULATION: PBT, BLACK COLOR. CONTACT: BRASS, GOLD FLASH.	1 pc	CB001
②	NON-UL 24AWG*2C+TALCUM, CABLE OD: 3.0mm, JACKET BLACK COLOR.	300mm	CA003
①	NON-UL 24AWG*4C+TALCUM, CABLE OD: 4.0mm, JACKET BLACK COLOR. (-20°C -+85°C)	2000mm	CA003
SPECIFICATION		Q'TY	VENDOR

MOLD DESIGN LIST:
J1 & J2:
DW163(OUT)
DW005(IN)

TOLERANCE: .XX= .XXX=	SCALE: NONE
UNIT: mm	

*** PINOUT DIAGRAM ***

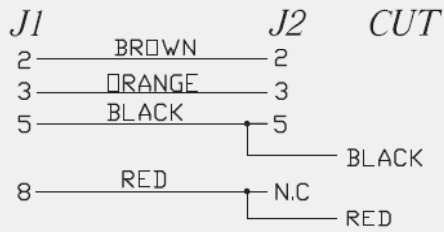

HO CHIEN
www.hochien.com

PART NO: CA-U0037-0001A		DWG NO: CKC01712006	REV: A
TITLE : GSTRHA 832R DB9F/DB9M+CUT		SHEET 1 OF 1	

DRAWG BY	胡朝卿	CHECK BY		APPROVED BY	
----------	-----	----------	--	-------------	--

CUST APPROVED	
---------------	--