


REV	DESCRIPTION	DATE
A	INITIAL RELEASE OF DWG	DEC.04.2007

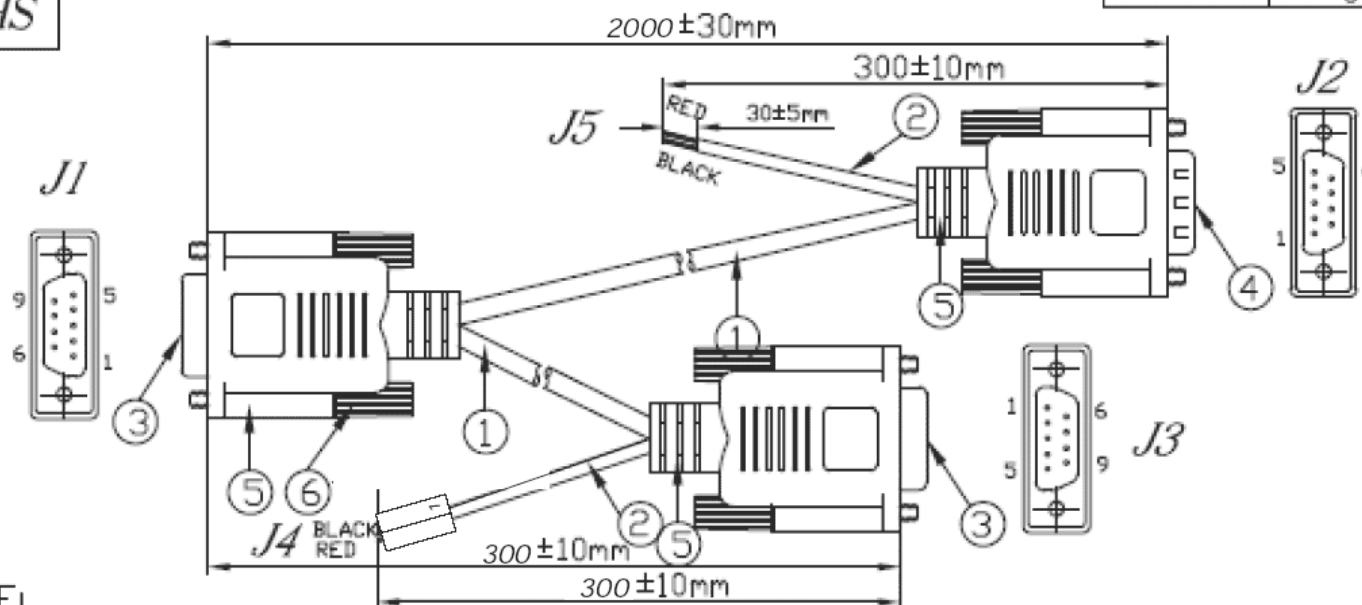

NOTE:

1. TEMPERATURE RANGE FOR THE CABLE SHOULD BE BETWEEN -20°C AND +85°C.
2. THE END RED AND BLACK WIRES BE CUT STRIPPING TINNING.

BILL OF MATERIAL

⑥	THUMB SCREW: UNC#4-40, AG4*24.0, BLACK COLOR MOLDING.	6 pc	CC006
⑤	45P PVC, BLACK COLOR.	48.0g	CC001
④	D-SUB 9P MALE SOLDERING TYPE. INSULATION: PBT, BLACK COLOR. CONTACT: BRASS, GOLD FLASH.	1pcs	CB001
③	D-SUB 9P FEMALE SOLDERING TYPE. INSULATION: PBT, BLACK COLOR. CONTACT: BRASS, GOLD FLASH.	2pcs	CB001
②	NON-UL 24AWG*2C+TALCUM, CABLE OD: 3.0mm, JACKET BLACK COLOR.	300mm 300mm	CA003
①	NON-UL 24AWG*4C+TALCUM, CABLE OD: 4.0mm, JACKET BLACK COLOR. (-20°C - +85°C)	300mm 2000mm	CA003
NO	SPECIFICATION	Q'TY	VENDOR

J4


Housing Tyco 521190-1
Terminal 1217039-1 or
Housing Molex 44441-2002
Terminal 43375

MOLD DESIGN LIST:

J1&J2&J3:

DW163(OUT)
DW005(IN)

TOLERANCE:
.XX= .XXX=




SCALE:
NONE

UNIT:
mm

CUST APPROVED

*** PINOUT DIAGRAM ***

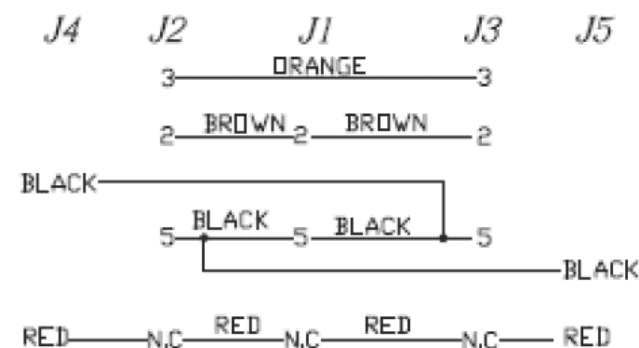

HO CHIENT
www.hochien.com

PART NO:

CA-U0037-0003

TITLE : GSTRHA 833R -2000
DB9F/DB9F+DB9M

DWG NO:

CKC01712007

REV:

A

SHEET 1 OF 1

DRAWG BY

胡朝卿

CHECK BY

APPROVED BY