




SPECIFICATION :

ELECTRICAL

Voltage Rating : 125 V
 Current Rating : 1.5 A
 Contact Resistance : 30 milliohms max.
 Insulation Resistance : 500 megaohms min.
 Dielectric Withstanding Voltage : 1000 V

MATERIAL & FINISH

Housing & Insert: PBT. UL94V-0, black
 Conductor: 0.35 mm thickness phosphor bronze,
 Gold plated over nickel on contact area,
 Tin plated over nickel on solder area.
 Temperature : -40 to +80 C
 Durability : 500 cycles min.

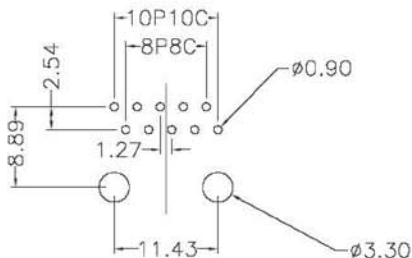

PCB LAYOUT / TOP VIEW

HC-012-10-XLXAN

F=8p8c
 G=10p10c

Gold plated 1=15u, 3=50u
 2=30u, 4=6u

HO CHIEN
 WWW.HOCHIEN.COM

TITLE

RJ45 TOP ENTRY PCB JACK
 UL & cUL FILE NO. E131820
 MODULAR JACKS ASSY FOR
 HC-012-10-XLXAN

SCALE SIZE DWG. NO. 9628 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
 THIRD ANGLE PROJECTION	LINEAR MM INCH	.00±0.01	.00±0.25	<i>Steven</i>	JUL-01 '08
		.000±0.005	.000±0.13	<i>Johnn</i>	JUL-01 '08
MM INCH	ANGLE +0°30'	RADIL	+0.45 -0.15	<i>Billy</i>	JUL-01 '08

DWG. NO. AST012030-1