




SPECIFICATION :

1. Electrical Char.


- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.


- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire :
 - 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
- Shielded : Brass Plating Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

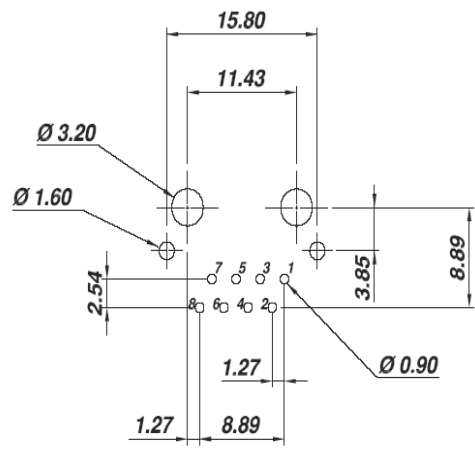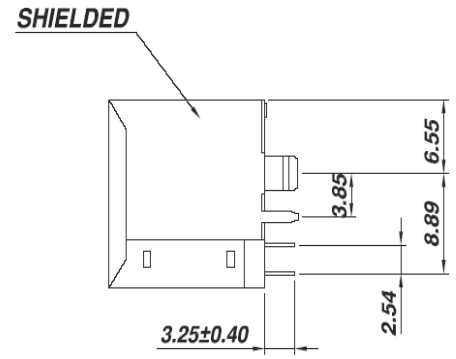

PCB LAYOUT
(Top View)



HC012SH9 F XXB5N1

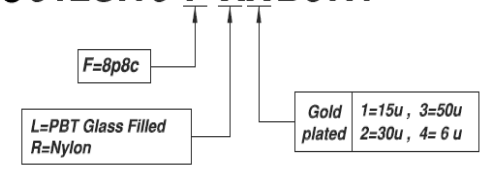

HO CHIEN
www.hochien.com

TITLE
RJ45 TOP ENTRY SHIELDED PCB JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
HC012SH9F XXB5N1

SCALE SIZE DWG. NO. 9628-S SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
 THIRD ANGLE PROJECTION	LINEAR	MM INCH	.00±0.01 .000±0.005 .0000±0.002	Steven CK'D	JUL-01 '08
	ANGLE +0°30'	RADIL	+0.45 -0.15	Johnn APP'D	JUL-01 '08
DWG. NO.	ASC012021-1			Billy	JUL-01 '08