





SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.


2. Physical char.

- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire :
 - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

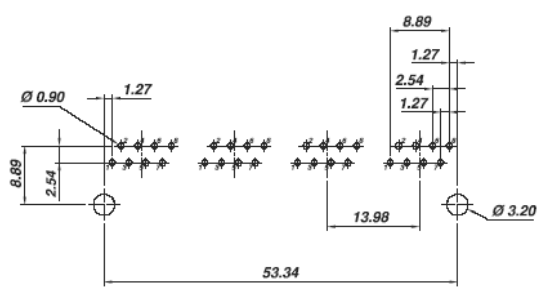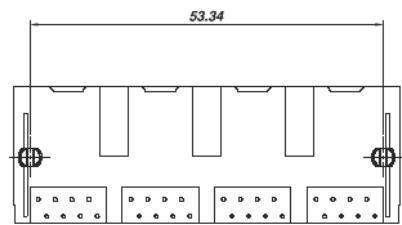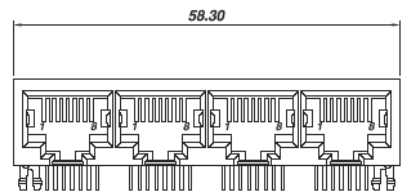

PCB LAYOUT
(Top View)

HC-040-4-F-XX

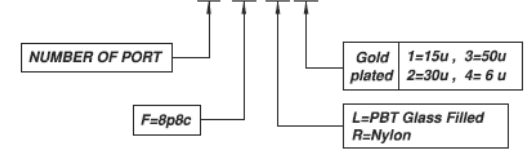

HO CHIEN
www.hochien.com

TITLE 1x4 8POSITIONS
SIDE ENTRY PCB GANG JACK
UL & cUL FILE NO. E131820

**MODULAR JACKS ASSY FOR
HC-040-4-F-XX**

SCALE SIZE DWG. NO. 9690 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$.00±0.01	.00±0.25	Steven	JUL-01 '08
		.000±0.005	.000±0.13	John	JUL-01 '08
	ANGLE ±0°30'	RADIL	+0.45 -0.15	Billy	JUL-01 '08

DWG. NO. **AST040003-2**