

**SPECIFICATION :**


**1. Electrical Char.**

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

**2. Physical char.**

- Housing (Option) :
  - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
  - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire :
  - 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
- Shielded : Brass Plating Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

**HC-600-21-F-XX-C**

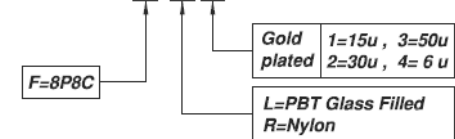

**HO CHIEN**  
www.hochien.com

TITLE

**DOUBLE DECK GANG PCB JACK**  
UL & cUL FILE NO. E131820

**MODULAR JACKS ASSY FOR**  
**HC-600-21-F-XX-C**

SCALE SIZE DWG. NO.9600 SERIES

DWG. NO.

**AST600007-4**

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
 THIRD ANGLE PROJECTION	LINEAR <b>MM</b> <b>INCH</b>	.00±0.01	.00±0.25	<i>Steven</i>	DEC-10 '08
		.000±0.005	.000±0.13	<i>John</i>	DEC-10 '08
		.0000±0.002	.0000±0.05	<i>Billy</i>	DEC-10 '08
<b>MM</b> <b>INCH</b>	ANGLE +0°30'	RADIL	+0.45 -0.15		