





SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.


2. Physical char.

- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire :
 - 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
- Shielded : Brass Plating Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

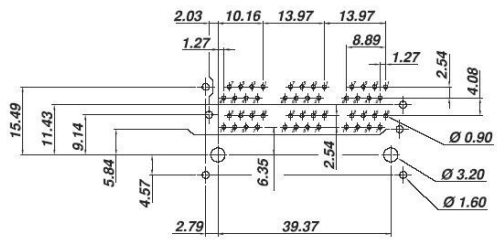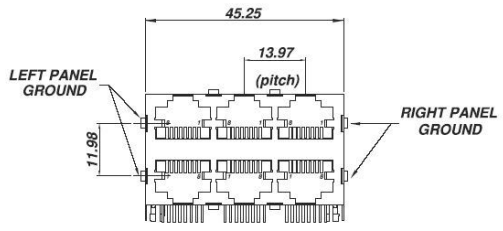

PCB LAYOUT
(Top View)

HC-600-23-F-XX-B

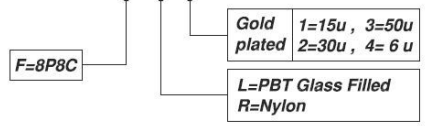

HO CHIEN

www.hochien.com

TITLE

DOUBLE DECK GANG PCB JACK

**MODULAR JACKS ASSY FOR
HC-600-23-F-XX-B**

SCALE SIZE DWG. NO.9600 SERIES

DWG. NO.
AST600022-2

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$.00±0.01 .000±0.005 .0000±0.002	.00±0.25 .000±0.13 .0000±0.05	Steven CK'D John APP'D Billy	DEC-10 '08 DEC-10 '08 DEC-10 '08
$\frac{MM}{INCH}$	ANGLE +0°30'	RADIL	+0.45 -0.15		