


2x2 Circuit

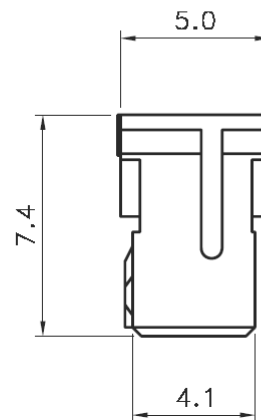

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ HOUSING

- Part No. : JS-2007-XXx2
- Poles : 3x2 - 16x2
- Material : Nylon 66 UL94V-0
- Q' ty: 1,000 pcs./Bag

Poles	Part No.	Dimensions(mm)	
		A	B
3x2	JS-2007-03x2	4.00	7.90
4x2	JS-2007-04x2	6.00	9.90
5x2	JS-2007-05x2	8.00	11.90
6x2	JS-2007-06x2	10.00	13.90
7x2	JS-2007-07x2	12.00	15.90
8x2	JS-2007-08x2	14.00	17.90
9x2	JS-2007-09x2	16.00	19.90
10x2	JS-2007-10x2	18.00	21.90
11x2	JS-2007-11x2	20.00	23.90
12x2	JS-2007-12x2	22.00	25.90
13x2	JS-2007-13x2	24.00	27.90
14x2	JS-2007-14x2	26.00	29.90
15x2	JS-2007-15x2	28.00	31.90
16x2	JS-2007-16x2	30.00	33.90

HO CHIEN www.hochien.com	APPROVED BY	SCALE	UNIT	TOLERANCE		LTR	REVISION RECORD	DATE	LTR	REVISION RECORD	DATE
	林宗		mm	.0	± 0.3	ECR	RoHS Compliant	06/04/01			
PART NO JS-2007-XXx2	CHECKED BY	PROJ	VER NO.	.00	± 0.2	ECR	200808-019	08/08/29			
				.000	± 0.1	ECR	200811-001	08/11/03			
2.00mm Crimp Style Connectors Housing			a2	ALL		\pm			CUSTOMER		ASUS
	DRAWN BY	DATE	SIZE	ANGLE					Conforms to The RoHS Instruction		
	黄科源	2008/11/03	A4	0 $^{\circ}$	\pm						
				.0 $^{\circ}$	\pm						