
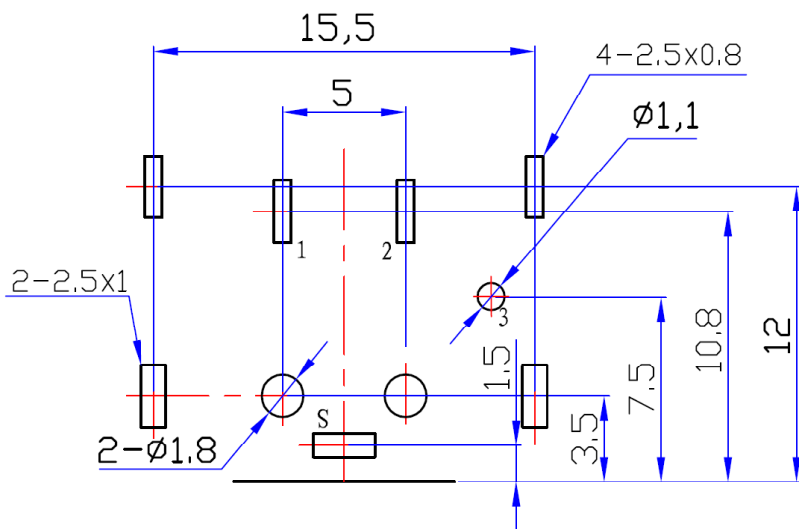


PCB layout (bottom view)

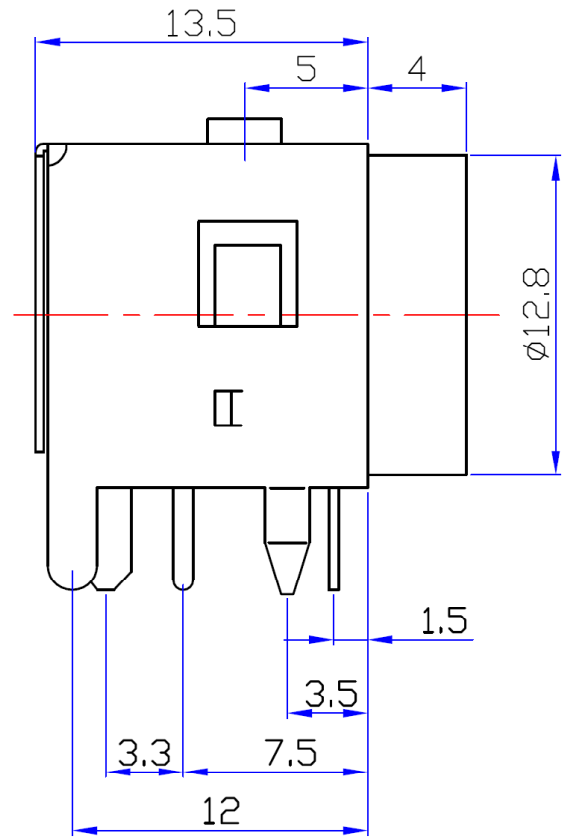

technical parameters

environment temperature : -25~70
 relative humidity : 95% (40)
 rated load : DC30V 0.3A
 contact resistance : =<0.03 Ohm
 insulation resistance : >=100M Ohm
 Test voltage : AC250V (50HZ) 1min
 Actuating Force:5-30N
 Longevity:5000 times

7	shell	1	shell 0.4	D. Cu/Sn
6	Enamelled	1	H62 brass strip Y=0.35mm	D. Cu/Sn
5	curved PIN	1	H62 brass strip Y=0.35mm	D. Cu/Sn
4	right long PIN	1	H62 brass strip Y=0.28mm	D. Cu/Sn
3	left short PIN	1	H62 brass strip Y=0.28mm	D. Cu/Sn
2	back shell	1	PBT	
1	pedestal	1	PBT	
Item No	Name	QTY	Material	Plated

HO CHIEN
www.hochien.com

PN# **PMC-3-03**
 Mini Din Power Jack PCB Mount Shielded