

PCB LAYOUT

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC.
 Dielectric Voltage : 1,000 Vrms 60 Sec. Min.


2. Physical char.

Housing : Nylon 46 (UL 94V-0)
 Color : Black Color
 Spring Wire : 0.35mm Thickness Phosphor Bronze
 Gold Plating Over Nickel
 Temperature Range : - 25 /+90 Deg C
 Durability : 500 Mating cycles Min.

3. LED filings.

Forward DC Current : 2 mA
 Forward Voltage : 1.8 Volts Typical
 Reverse Voltage : 5 Volts Min.

HC-012SH9FXY-XX

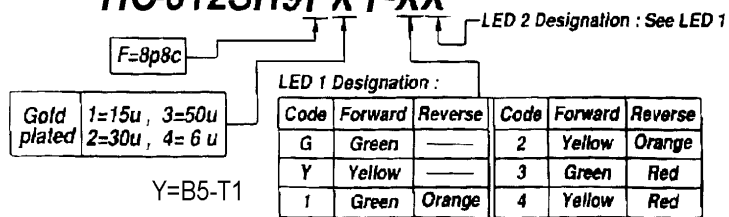

HO CHIEN

www.hochien.com

TITLE

RJ45 TOP ENTRY SHIELDED PCB JACK WITH LED

UL & cUL FILE NO. E131820

**MODULAR JACKS ASSY FOR
 HC-012SH-9-F-X-B5-T1-XX**

SCALE SIZE DWG. NO. 9628-S SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
	LINEAR	MM INCH	00±0.1 000±0.05 0000±0.02	00±0.25 000±0.13 0000±0.05	Steven SEP-12 '03
	ANGLE +0°30'	RADIL	+0.45 -0.15	CK'D Johnn APP'D Billy	SEP-12 '03 SEP-12 '03 SEP-12 '03

DWG. NO.

AS012020