

PCB LAYOUT

SPECIFICATION :


1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC
 Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT 20% Glass Filled (UL 94V-0)
 Color : Black Color
 Spring Wire : 0.45mm Dia. Phosphor Bronze
 Gold Plating Over Nickel
 Temperature Range : - 25 /+90 Deg C
 Durability : 500 Mating cycles Min.

HC-032-8k-F-X

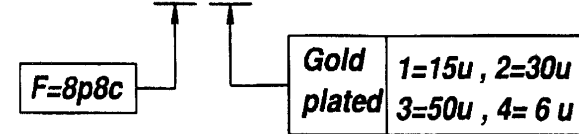

HO CHIEN
www.hochien.com

TITLE
LOW PROFILE PCB MOUNT SIDE ENTRY JACK
 UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
HC-032-8k-F-X

SCALE SIZE DWG. NO. 9663 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
 THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00±0.1	00±0.25	Steven	MAR-31 '03
		000±0.05	000±0.13	Johnn	MAR-31 '03
	ANGLE +0°30'	RADIL	+0.45 -0.15	Billy	MAR-31 '03

DWG. NO.
AS032004