


PCB LAYOUT

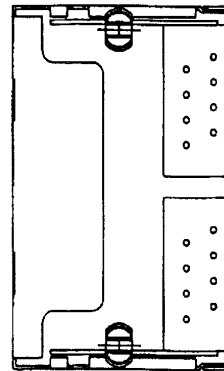

SPECIFICATION :


1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing : PBT 20% Glass Filled (UL 94V-0)
- Color : Black Color
- Spring Wire : 0.45mm Dia. Phosphor bronze
- Gold Plating Over Nickel
- Temperature Range : - 25 /+90 Deg C
- Durability : 500 Mating cycles Min.

HC-040SH 2 F X A3 N1

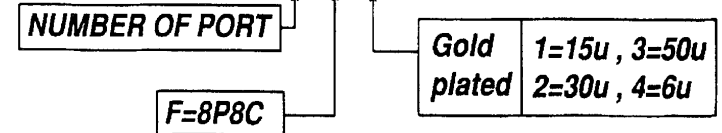

HO CHIEN

www.hochien.com

TITLE
1x2 8POSITIONS
SIDE ENTRY SHIELDED PCB GANG JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
HC-040SH-2-F-X-A3-N1

SCALE SIZE DWG. NO. 9690S SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. Steven	DATE AUG-06 '03
THIRD ANGLE PROJECTION	LINEAR MM INCH	00±0.1 000±0.05 0000±0.02	00±0.25 000±0.13 0000±0.05	CK'D Johnn	AUG-06 '03
MM INCH	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D Billv	AUG-06 '03

DWG. NO.

AS040014