

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC
 Dielectric Voltage : 1,000 Vrms 60 Sec. Min.


2. Physical char.

Housing : PBT 20% Glass Filled (UL 94V-0)
 Color : Black Color
 Spring Wire : 0.35mm Thickness Phosphor Bronze
 Gold Plating Over Nickel
 Temperature Range : - 25 /+90 Deg C

HC-062SH-8-F-X-A1-N1-FB


F=8p8c

Gold plated	1=15u, 3=50u 2=30u, 4= 6u
-------------	------------------------------

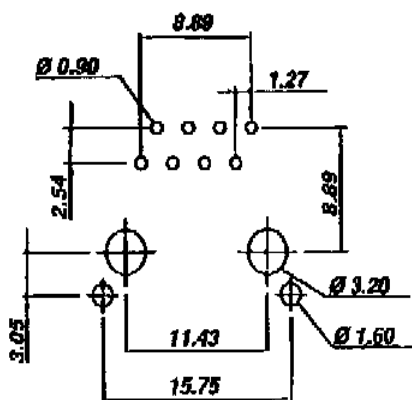

PCB Layout

Impedance Characteristic:

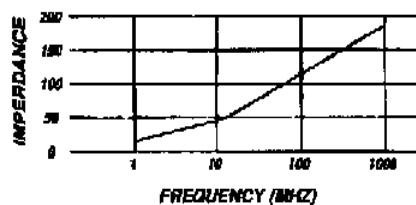

HO CHIEN

TITLE SIDE ENTRY PCB MOUNTING SHIELDED
 JACK WITH FERRITE FILTER
 UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
 HC-062SH-8-F-X-A1-N1-FB

SCALE SIZE DWG. NO.9662-8SFB SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
 THIRD ANGLE PROJECTION	LINEAR MM INCH	00±0.1	00±0.25	Steven	MAR-31 '03
		000±0.05	000±0.13	John	MAR-31 '03
MM INCH	ANGLE ±0°30'	RADN.	+0.45 -0.15	Billy	MAR-31 '03

DWG. NO.

AS062017