


PCB LAYOUT



SPECIFICATION :


1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing : Nylon 46 (UL 94V-0)
- Color : Black Color
- Spring Wire : 0.35mm Thickness Phosphor Bronze
- Gold Plating Over Nickel
- Temperature Range : - 25 /+90 Deg C

HC-068SH-8-F-X-B4-T1

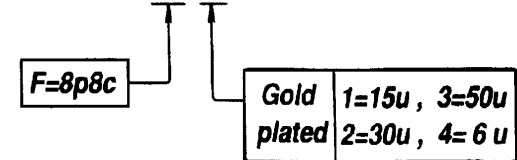

HO CHIEN www.hochien.com
TITLE RJ45 SIDE ENTRY SHIELDED PCB JACK UL & cUL FILE NO. E131820
MODULAR JACKS ASSY FOR HC-068SH-8-F-X-B4-T1
SCALE SIZE DWG. NO. 9715S SERIES

DWG. NO. **AS068006**

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. Steven	DATE MAY-29 '03
 THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00 ± 0.1 000 ± 0.05 0000 ± 0.02	00 ± 0.25 000 ± 0.13 0000 ± 0.05	CK'D Johnn	MAY-29 '03
$\frac{MM}{INCH}$	ANGLE +0'30'	RADIL	$+0.45$ -0.15	APP'D Billy	MAY-29 '03