





# SPECIFICATION :

## 1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

## 2. Physical char.

- Housing : PBT Glass Filled (UL 94V-0)
- Color : Black Color
- Spring Wire : 0.35mm Thickness Phosphor Bronze  
Gold Plating Over Nickel.
- Temperature Range : - 25 /+90 Deg C
- Durability : 500 Mating cycles Min.

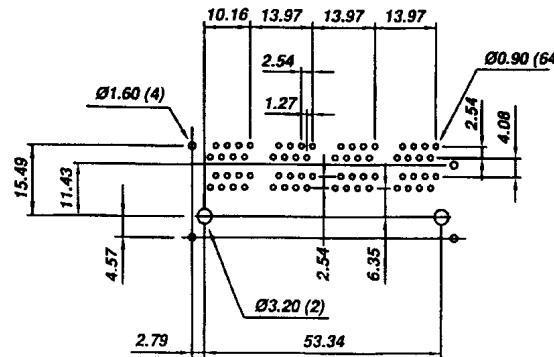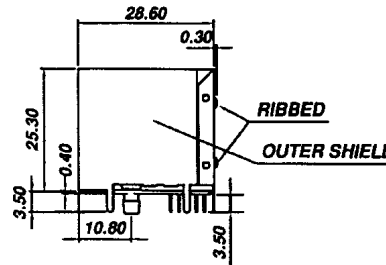

**PCB LAYOUT**  
(Top View)

# HC-600-24-F-X-D

F=8p8c

Gold plated

1=15u, 3=50u  
2=30u, 4= 6 u

# HO CHIEN

www.hochien.com

TITLE

DOUBLE DECK GANG PCB JACK  
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR  
HC-600-24-F-X-D

SCALE SIZE DWG. NO.9600 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR	00±0.01	00±0.25	DR. Steven	AUG-16 '04
		000±0.005	000±0.13	CK'D Johnn	AUG-16 '04
	ANGLE	0°30'	RADIL	APP'D Billy	AUG-16 '04
MM INCH					

DWG. NO.

**AS600024**