

HSF








NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass Or Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

6P Without Slot "M" and "N"
 8P-12P With Slot "M", Without Slot "N"
 14P-64P With Slot "M" and "N"

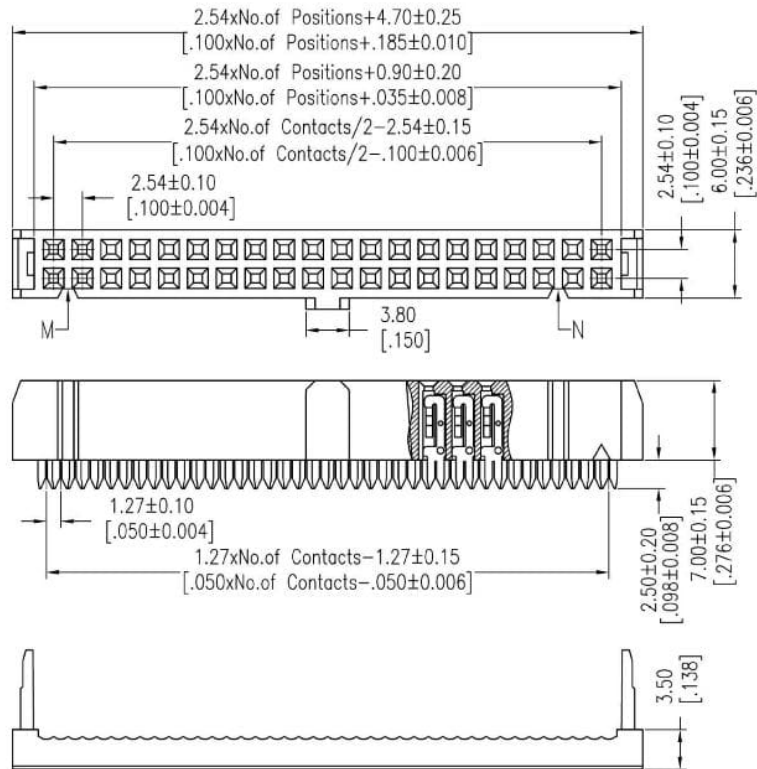

Ordering Information

2540S- XX

X - X - X

Two Parts
 Conn+Cover

No. of Pins
 06P 26P
 08P 30P
 10P 34P
 12P 36P
 14P 40P
 16P 44P
 18P 50P
 20P 60P
 22P 64P
 24P


Color
 Blank: Black Color
 G: Gray Color

Options
 Blank: With Polarization/ and Strain Relief
 N: Without Center Polarization w Strain Relief

Contact Plating
 Blank: Gold Flash Selected
 F: 10u" Selected Gold
 E: 15u" Selected Gold
 D: 30u" Selected Gold

Item	Pitch	Mating
Standard	2.54	3110/3210
Alternate		

BUTTERFLY SR PN#: 2540S-XXSR

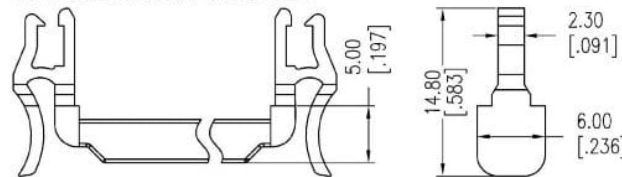

OPERATION	DRAW	DATE	SCALE	FIT
X.X ±0.40			UNIT	mm
X.XX ±0.25	CHECK	DATE	SIZE	A4
X.XXX ±0.15			SHEET	1/1
Angle ± 3'	APPROVE	DATE	PROJ.	
DIM TOL				

PART NO.
2540S-XXX-X-X

TITLE:
 2.54 IDC SOCKET+SR
 (ONE SIDE CONTACT)

HO CHIEN
 www.hochien.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0			