
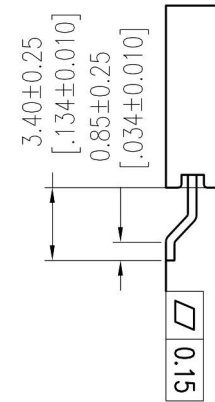
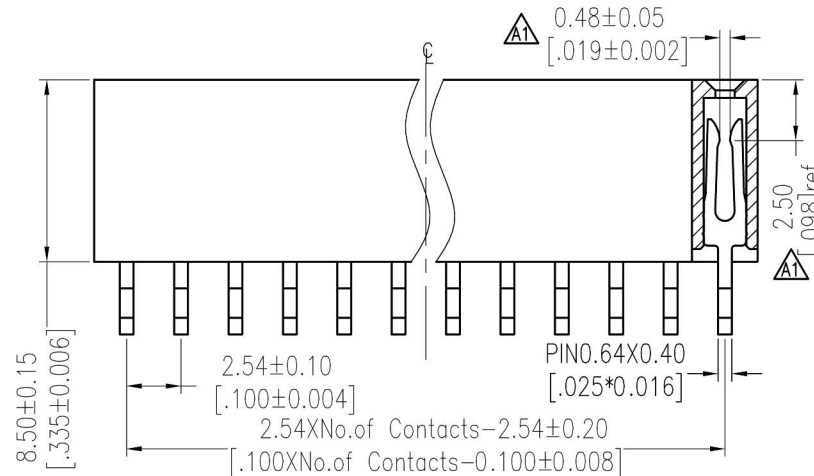
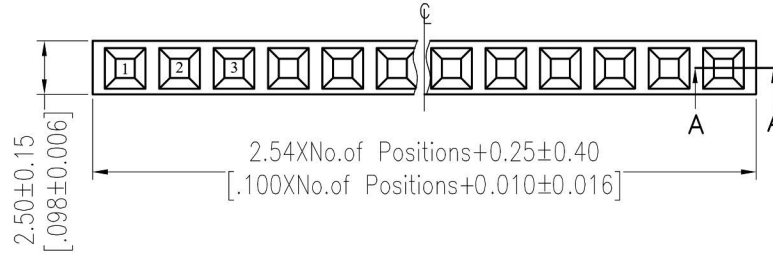


# HSF

NOTES:  
 Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze Or Brass  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+33%G.F UL94V-0

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

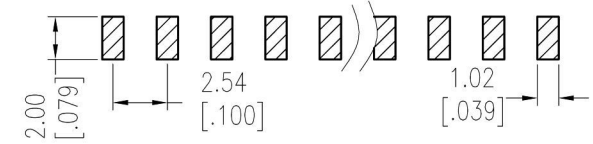

## Ordering Information

2555M - 1X XX XX - X

No. of Pins: 2 - 40 PIN  
 Contact Plating: G = Gold, GT = Gold/Tin, T = Tin  
 Packing: Blank = Tube, A = Tray, T = Tape & Reel

Item	Pitch	Mating
Standard	2.54	
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40		2017/07/11	UNIT	mm	2555M-1XXXXX-X
A1	2017/07/11	Modify	△	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
AO	2012/08/15	NEW	-----	X.XXX ±0.15		DATE	SHEET	1/1	FH2.54 SINGLE ROW 90°SMT H=8.5
				Angle ± 3'	APPROVE	DATE	PROJ.	Customer NO.	
				DIM TOL					

**HO CHIEN**  
 www.hochien.com