
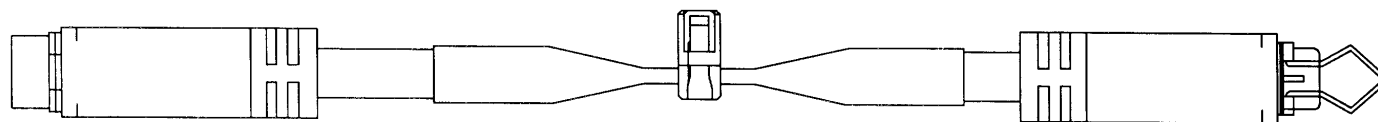


REVISION	DESCREPTION	DATE	APPD
0	SET UP	JAN/10/2005	C.Y.LIN

Laminate the IDC Connector
 Ref: <http://www.hochien.com/Laminated.html>
 Ref: <http://www.hochien.com/LaminateRoundtoflat.PDF>
 Ref: <http://www.hochien.com/LaminateRoundtoflat.gif>

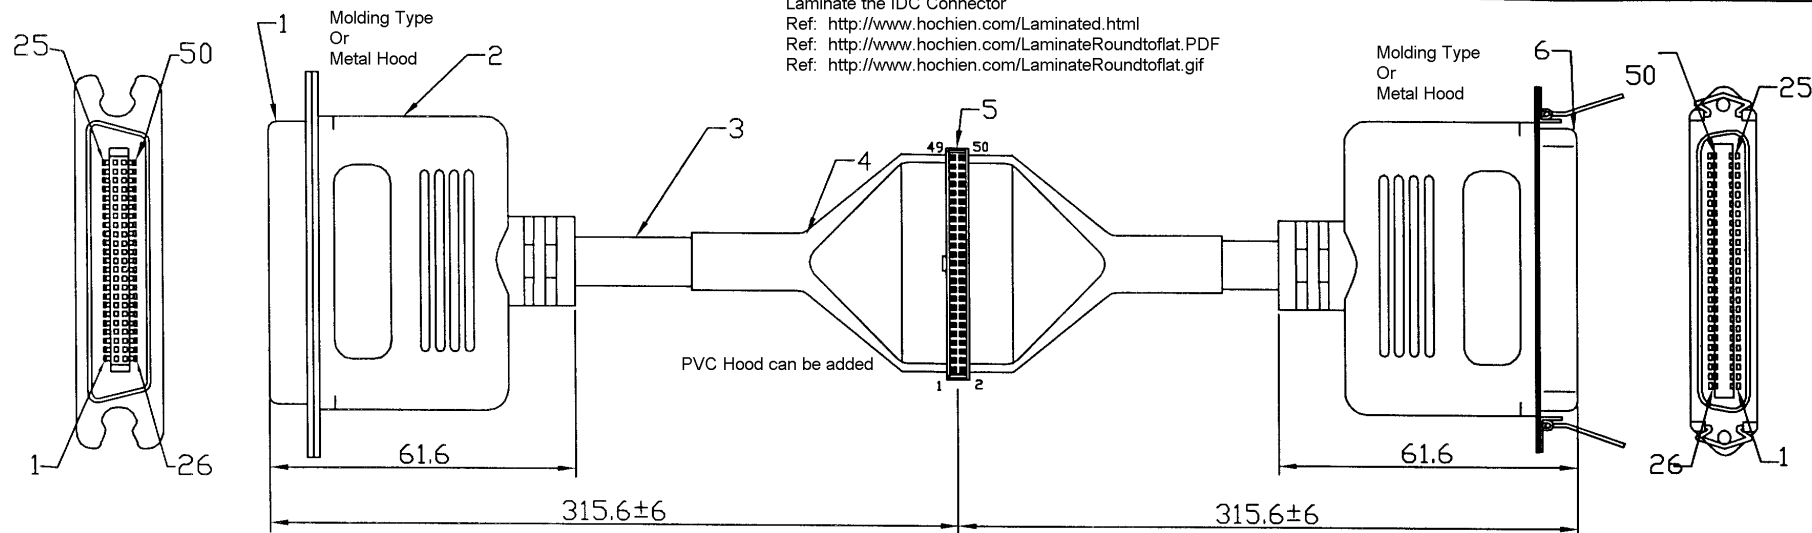

NOTE:
 THE PIN ASSENGMENT IS ONE TO ONE

ELECTRICAL CHARACTER:
 1. 100% OPEN/SHORT.
 2. CONTACT RESISTANCE: 20HMS
 3. HI-POT: 300V 10MS
 4. INSULATION RESISTANCE: 20MOHMS

6		RC 50 PIN FEMALE TYPE SHELL PLATED NICKEL CONTACT:GOLD FLASH	2	PCS
5		IDE 50 PIN FEMALE HEADER TYPE	1	PCS
4		PVC HOOD BLACK IN COLOR	2	PCS
3		UL2919 28AWG*25P+AED JACKET COLOR:BEIGE OD:9.5		
2		55P PVC MOLD BEIGE IN COLOR		
		RC 50 PIN MALE TYPE SHELL PLATED NICKEL CONTACT:GOLD FLASH	1	PCS
NO	PART NO.	DESCRIPTION	QTY	UNIT



HO CHIEN ENTERPRISE CO. LTD

TITLE:

Cable Assembly

PAGE: 1 OF 1

HO CHIEN P/N.

WH-C4076-012B

DR: RON CHEN

CHK: J.T.CHEN

APPD: C.Y.LIN