

# HO CHIEN






1.27 x 1.27mm (0.05" x 0.05")  
Pin Header Dual Row with Local Peg S.M.T. type

## Specifications

Current Rating: 1.0 Ampere  
Insulation Resistance: 1000MΩ Min.  
Dielectric Withstanding: 300V AC  
Contact Resistance: 20mΩ Max.  
Operating Temperature: -40°C to +105°C

## Materials

Contact Material: Copper Alloy  
Insulation Material: Polyester, UL 94V-0  
Nylon-6T

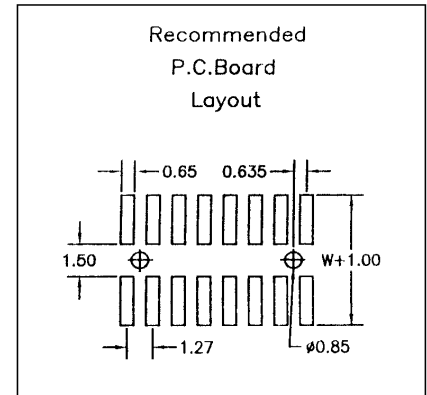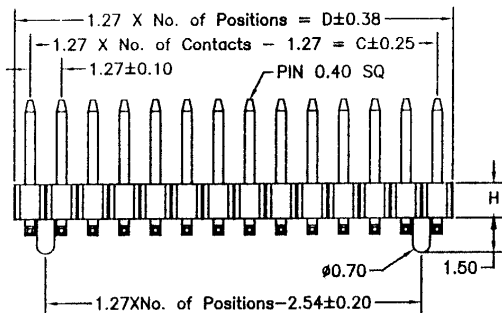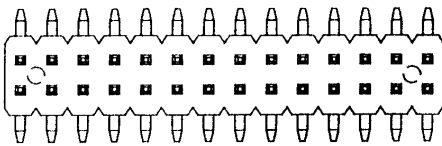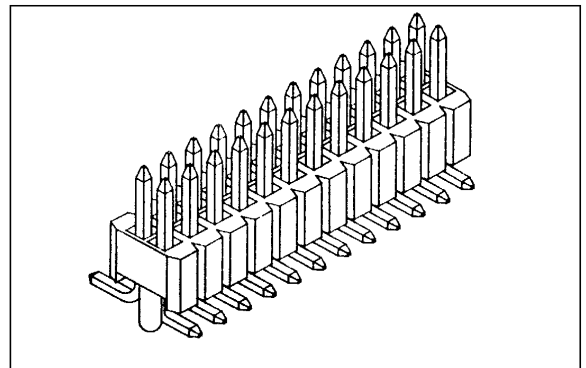

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
-	-	-	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64
03	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91
04	3.81	5.08	14	16.51	17.78	24	29.21	30.48			
05	5.08	6.35	15	17.78	19.05	25	30.48	31.75			
06	6.35	7.62	16	19.05	20.32	26	31.75	33.02			
07	7.62	8.89	17	20.32	21.59	27	33.02	34.29			
08	8.89	10.16	18	21.59	22.86	28	34.29	35.56			
09	10.16	11.43	19	22.86	24.13	29	35.56	36.83			
10	11.43	12.70	20	24.13	25.40	30	36.83	38.10			
11	12.70	13.97	21	25.40	26.67	31	38.10	39.37			

## Ordering Information

2272-2X \_\_\_ X - \_\_\_ B

No. of Pins per Row

03 ~ 33

G: Gold Plating

GT: Gold / Tin Plating

HEIGHT OPTION

08=1.00mm

09=1.50mm

10=1.70mm

11=2.00mm

12=2.50mm

13=2.70mm

14=3.00mm

H