


# 4000-3396, 4010-3396 Series DIN41612 R Type Male

# HO CHIEN

WWW.HOCHIEN.COM

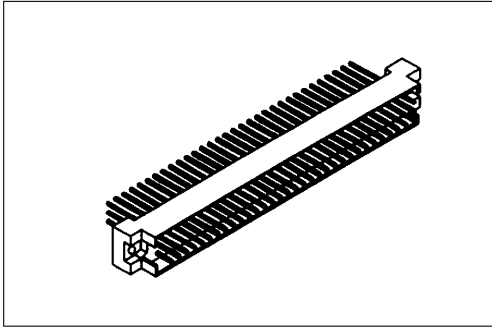

### Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

### Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.







Insulator Resistance: 1000MΩmin. at DC 500V.

Contact Resistance: 30mΩmax. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

### Features:

- \* UL, cUL listing.
- \* Mates with Female 3Row

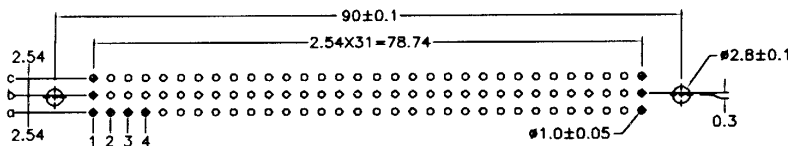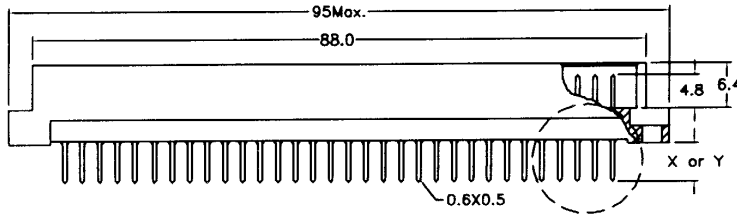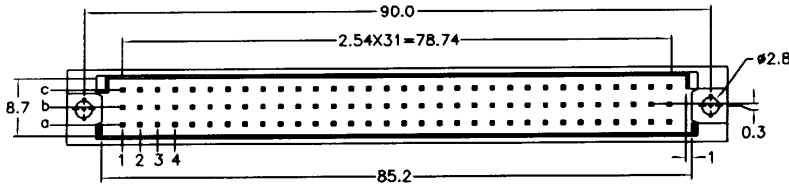

P.C. Board Layout

Length	1	2	W1	W2
X	4.0	2.5	13	17
Y	4.6	6.3	13	17

Part Number	Pitch	Position	Rows with Contacts	Contact Arrange
4000-3396	2.54mm	96	a b c	
4000-334B		48	a b c	
4000-3264		64	a - c	
4000-2132		32	a - -	
4010-3396	5.08mm	48	a b c	
4010-3264		32	a - c	
4010-2132		16	a - -	

### Product Coding

4000-3396

4010-3396

See table

4000-3396 : 2.54mm

4010-3396 : 5.08mm

male 96 Position

1

Blank: 4.0mm

2: Dip Length

W1: Dip Length

W2: Dip Length

C

C: Dip Tin

Contact Gold

G: Gold

00

Blank: G/F

10: 10 μ"

15: 15 μ"

30: 30 μ"

P

Blank: Dip

P: Press Fit

L1

Blank: W/O Lock

L1: With Lock

\*Standard Gold Flash.

\*32, 64 Pin Standard a - c Row.