


REVISION	DESCREPTION	DATE	APPD
0	SET UP	MAR/01/2006	C.Y.LIN

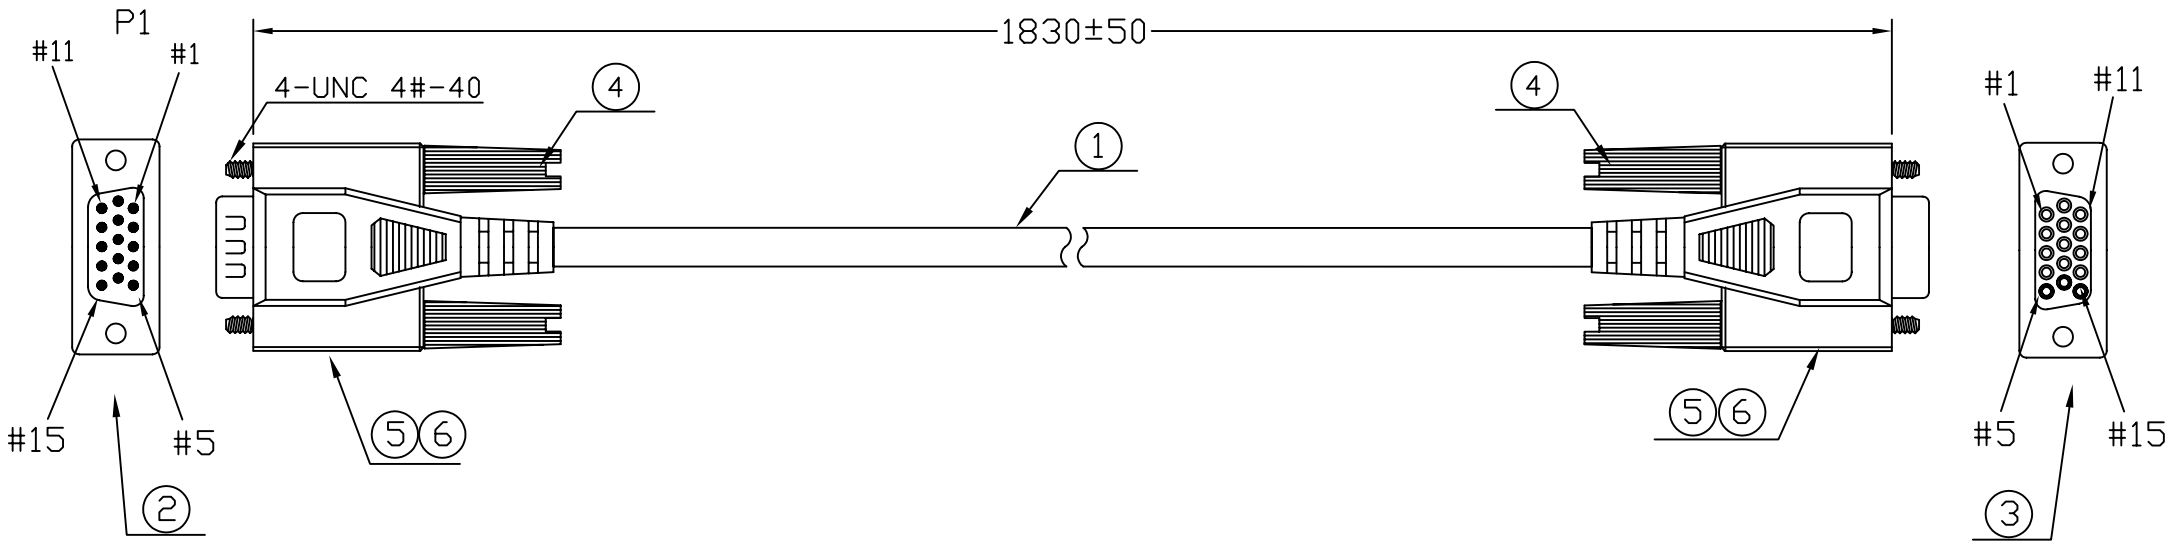

PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
S	S

RoHS COMPLIANT

6	120010000006	PVC-BEIGE02/50	37	G	INNER MOLDING	IDB9-1507
5	370	PVC-IN	8.6	G	OUTER MOLDING	IDB9-1527
4	240010100034	SRW-E31.5/BEIGE02	4	PCS		
3	110022115001	CDS-H15S/<BLUE>	1	PCS		
2	110021115001	CDS-H15P/<BLUE>	1	PCS		
1	100100215R02	28-15C+D+A-BEIGE02-6.0NDNUL	1.83	M		
NO	PART NO.	DESCRIPTION	QTY	UNIT		

 HO CHIEN ENTERPRISE CO. LTD

TITLE :

L = LENGTH

PN# CA-C1060-0001

6'

Connector 1: High density D-Sub 15P Male

Connector 2: High density D-Sub 15P Female

<u>Connector 1</u>	Pin out: Full Loaded	<u>Connector 2</u>
1	—————	1
2	—————	2
3	—————	3
4	—————	4
5	—————	5
6	—————	6
7	—————	7
8	—————	8
9	—————	9
10	—————	10
11	—————	11
12	—————	12
13	—————	13
14	—————	14
15	—————	15

Non UL shielding cable 28AWG 15C+1