


USB A MALE

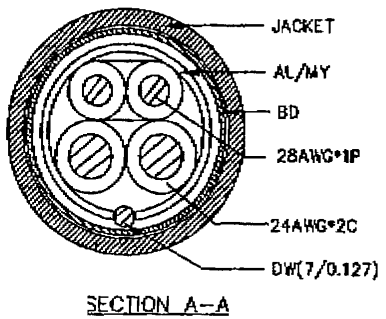

SECTION A-A

NOTES:

1. MOLDED CONNECTOR END REQUIREMENTS: PVC BLACK
2. CABLE: [28AWG (7/0.12)*1P + 24AWG(7/0.203)*2C + AL/MY + DW(7/0.127) + 65%BD(16/5/0.1)]TIN
 INSULATION WIRE ONE, TWISTED PAIR, OD = 0.84±0.05mm
 COLOR: WHITE&GREEN
 INSULATION WIRE TWO: OD = 1.1±0.07mm
 COLOR: BLACK, RED
 JACKET: 80°C 80P PVC OD = 5.00±0.15mm
 COLOR: BLACK

P1	WIRES/COLOR
1	RED 24 AWG
2	WHITE 28 AWG
3	GREEN 28 AWG
4	BLACK 24 AWG

SHELL

HO CHIEN <i>www.hochien.com</i>			
USB CABLE			
SIZE B	FORM NO.	DWG NO. WH-B7031-0001A	REV AA
SCALE N/A	11/7/2002	SHEET	1 OF 1