
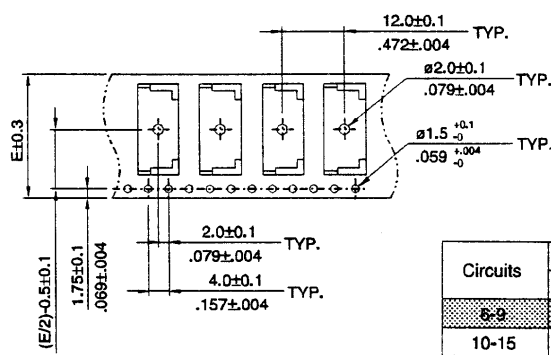
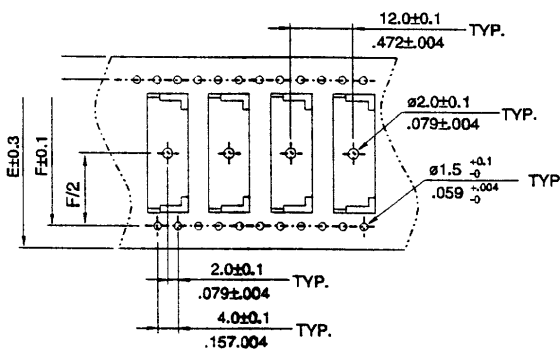


REVISION	DESCRIPTION	DATE	APPD
0	SETUP	6/15/98	C Y

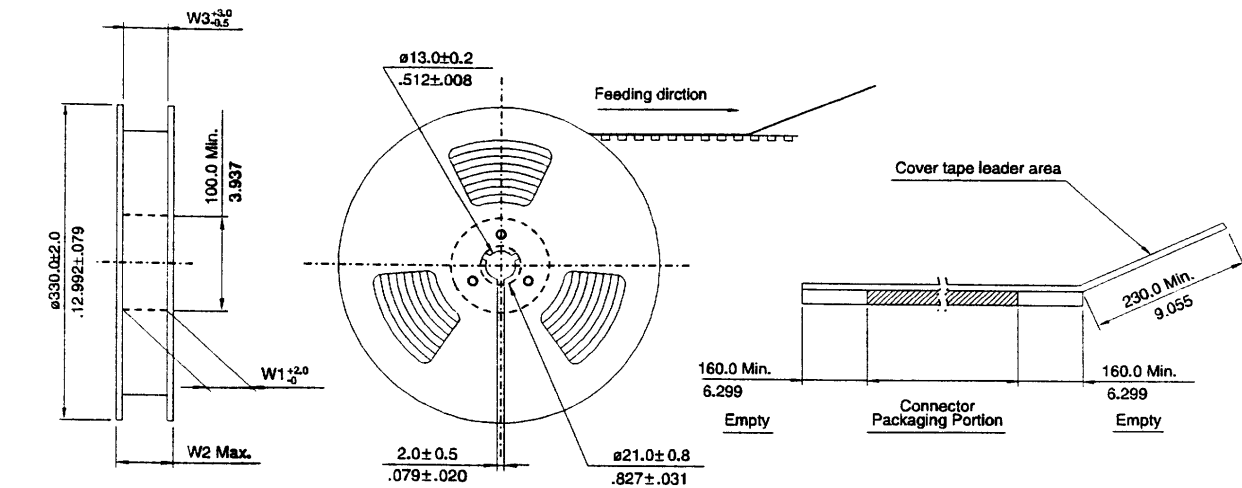

• Width : 32,44,56 mm Carrier

Width : 24 mm Carrier

Circuits	Dimension				
	E	F	W1	W2	W3
6-9	24.0(1.945)	-	24.4(1.981)	30.4(1.197)	24.4(1.961)
10-15	32.0(1.260)	28.40(1.118)	32.4(1.276)	38.4(1.512)	32.4(1.276)
16-26	44.0(1.732)	40.40(1.596)	44.4(1.748)	50.4(1.984)	44.4(1.748)
27-32	56.0(2.205)	52.40(2.063)	56.4(2.220)	62.4(2.457)	56.4(2.220)

NOTE I

REEL MATERIAL : HIPS
 CARRIER : BLACK CONDUCTIVE POLYSTYRENE ALLOY
 COVER TAPE : POLYESTER
 COVER TAPE PEEL STRENGTH : 0.1N - 1.3N
 CARRIER CAMBER IS WITHIN 1mm IN 10mm
 ALL DIMENSION MEET EIA-481-2 & EIA-481-3 REQUIREMENT.
 QUANTITY :2000 EA PER REEL

CODING			
MATERIAL	DR	Jecaca Yang	HO CHIEN ENTERPRISE CO. LTD.
SEE NOTE I	CHK	Z T Chen	
ELECTRICAL PERFORMANCE	APPD	C Y Lin	1.00MM SMT ZIF FFC/FPC 12007 UPSIDE CONNECTORS 12008 DOWNSIDE CONNECTORS TAPE & REEL PACKING
SEE NOTE II	APPD		

THIS DRAWING IS A CONTROLLED DOCUMENT OF HO CHIEN ENTERPRISE CO. LTD. IT IS SUBJECT TO CHANGE

UNIT	SCALE	WEIGHT	PAGE	1 OF 1	HO CHIEN P/N NO.	12007/8 PACKING
------	-------	--------	------	--------	------------------	-----------------