
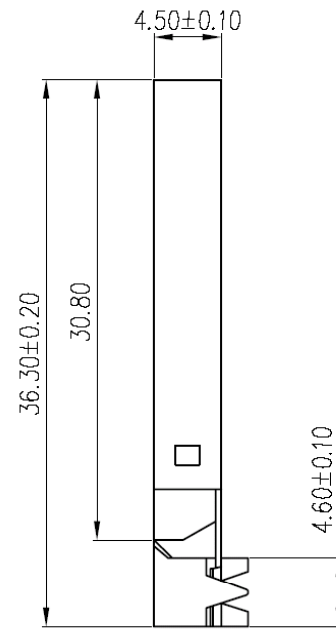
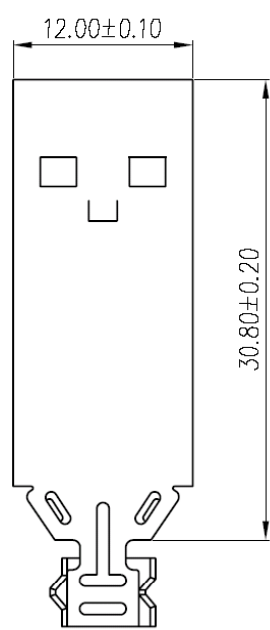
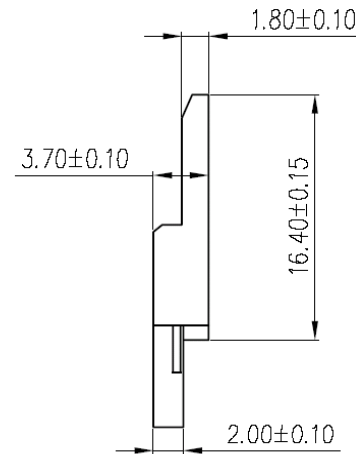


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISOR	APPD

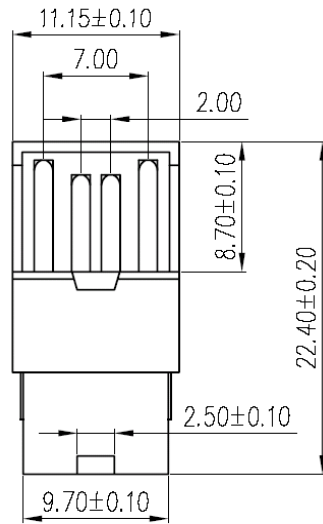

長線夾OD: 5.00±0.20

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Cold Rolled Steel,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel plated.

4	Back-shell	1	Cold Rolled Steel	T=0.30mm	Nickel Plated
3	Front-shell	1	Cold Rolled Steel	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

PART NO:		MATERIAL:		HO CHIEN www.hochien.com	
MODEL NO:		FINSH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 黃義強 '06/04/06		USB-A TYPE SOLDER(M)長線夾	
.x ±0.3	.xx ±0.20	CHK: Kevin '06/04/06		DWG NO: 279	REV: AO
.xxx ±0.100	ANG. ±1°	APP: Kent '06/04/06		SCALE: 2:1	SHEET: 1 of 1