
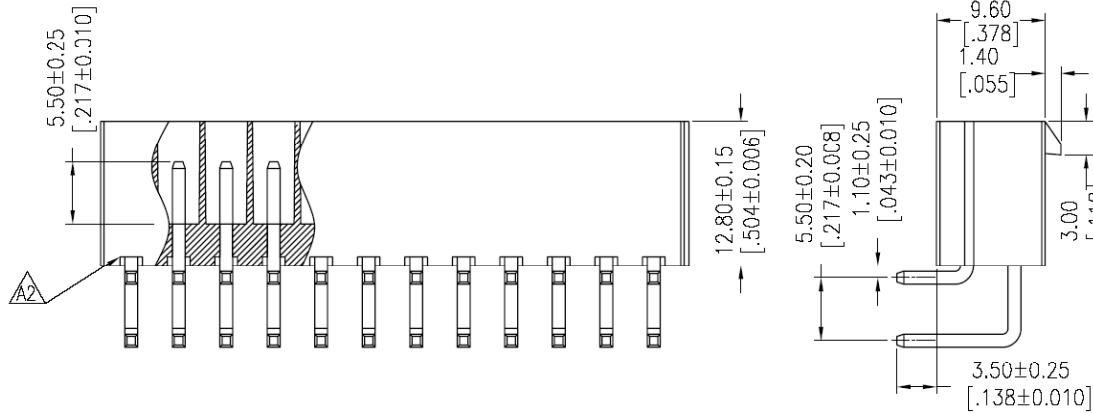
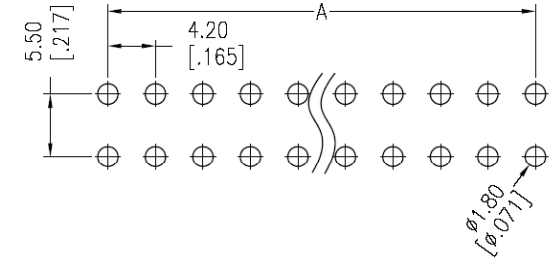


HSF

NOTES:
 Rated Current:15AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:1500V AC/minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25°C to +85°C

Contact Material:Brass
 Contact Plating:Sn Over Ni
 Insulator Material:PA66+15%G.F UL94V-2

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

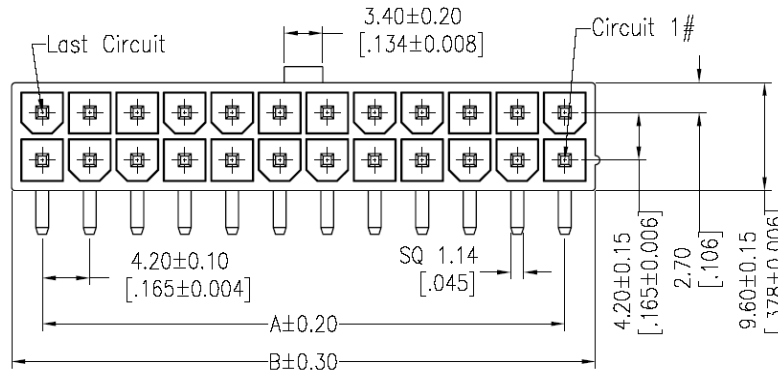


Dimensional & Ordering Information


Circuit	Part No.	Dimension		Pcs /Tray
		A	B	
2x01	4201R-02	---	5.40	410
2x02	4201R-04	4.20	9.60	230
2x03	4201R-06	8.40	13.80	160
2x04	4201R-08	12.60	18.00	130
2x05	4201R-10	16.80	22.20	100
2x06	4201R-12	21.00	26.40	80
2x07	4201R-14	25.20	30.60	70
2x08	4201R-16	29.40	34.80	60
2x09	4201R-18	33.60	39.00	60
2x10	4201R-20	37.80	43.20	50
2x11	4201R-22	42.00	47.40	50
2x12	4201R-24	46.20	51.60	40

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	SHEET	TITLE
A2	10/09/15	Modify drawing by objective	马云青		X.X ±0.40	William Chen	1:1	1/2	4.20 MINI FIT DUAL ROW 90° WITHOUT POST
A1	09/09/12	Packing code from "0" to "A"			X.XX ±0.25	09.09.12	UNIT	mm	HO CHIEN www.hochien.com
A0	08/08/04	NEW			X.XXX ±0.15		SIZE	A4	PART NO. 4201R-XX
					Angle ± 3°		SHEET	1/2	TITLE:
					DIM TOL		PROJ.	Customer NO.	


HSF




2x01P




2x02P




2x03P




2x04P




2x05P




2x06P

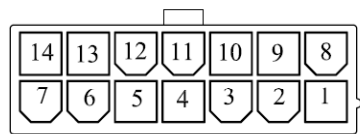


2x07P

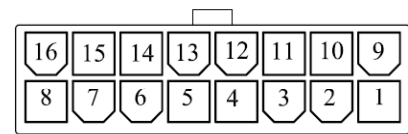


2x08P




2x09P

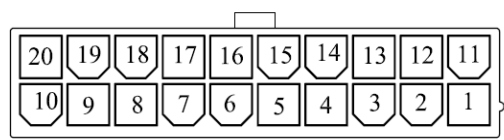

2x10P

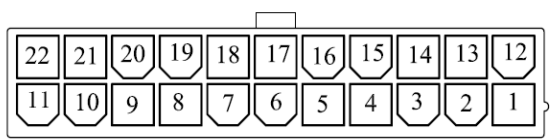

2x11P

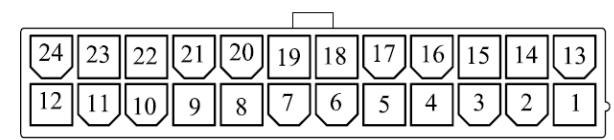

2x12P

					OPERATION	DRAW	<i>William Chen</i>	<i>09.09.12</i>	SCALE	1:1	HO CHIEN www.hochien.com	
					X.X ±0.40	DESIGN			UNIT	mm		
A1	09/09/12	Packing code from "0" to "A"			X.XX ±0.25	CHECK			SIZE	A4	PART NO.	WF4202 2WRXXWA1
A0	08/08/04	NEW			X.XXX ±0.15	APPROVE			SHEET	2/2	TITLE:	4.20 MINI FIT DUAL ROW 90° WITHOUT POST
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE				PROJ.		Customer NO.	
					Angle ± 3'							
					DIM TOL							