

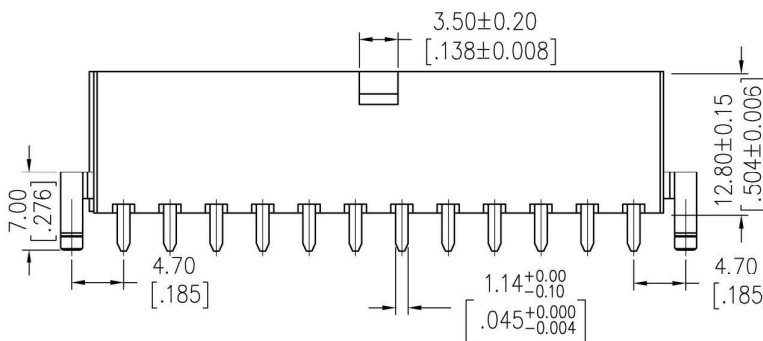

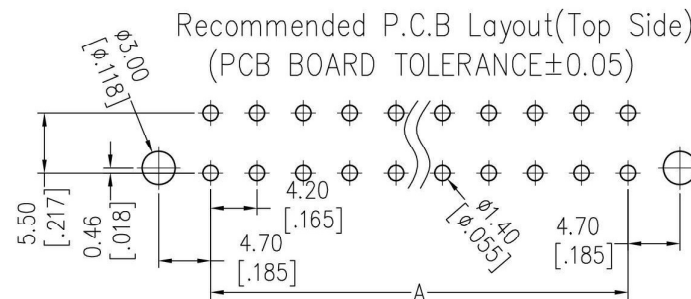


HSF

NOTES:
 Rated Current: 9.0AMP
 Contact Resistance: 30mΩ max
 Withstand Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

Contact Material: Brass
 Contact Plating: Au Or Sn Over Ni
 Insulator Material: PA66 Or PA46

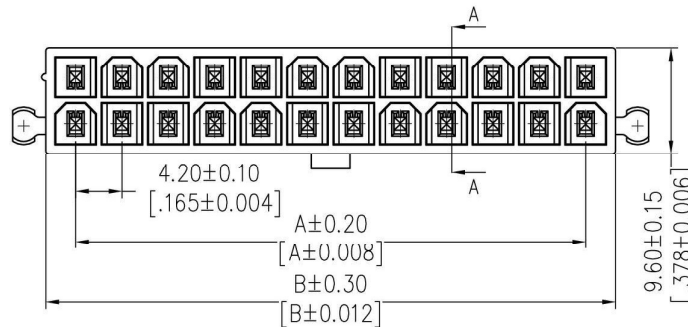

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x01	4201SA-02	---	5.40
2x02	4201SA-04	4.20	9.60
2x03	4201SA-06	8.40	13.80
2x04	4201SA-08	12.60	18.00
2x05	4201SA-10	16.80	22.20
2x06	4201SA-12	21.00	26.40
2x07	4201SA-14	25.20	30.60
2x08	4201SA-16	29.40	34.80
2x09	4201SA-18	33.60	39.00
2x10	4201SA-20	37.80	43.20
2x11	4201SA-22	42.00	47.40
2x12	4201SA-24	46.20	51.60

OPERATION	DATE
X.X ±0.40	2012/09/17
X.XX ±0.25	DATE
X.XXX ±0.15	DATE
Angle ± 3'	DATE
DIM TOL	

DRAW
JYHuang

CHECK

APPROVE

DATE
2012/09/17

DATE

DATE

SCALE
UNIT
SIZE
SHEET
PROJ.

FIT
mm
A4
1/2
☉

PART NO.
SEE TAB













TITLE:
4.20 MINI FIT DUAL ROW 180°
WITH SHORT BUMP AND DUAL POST

Customer NO.

Ho Chien
www.hochien.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/09/17	NEW	

HSF

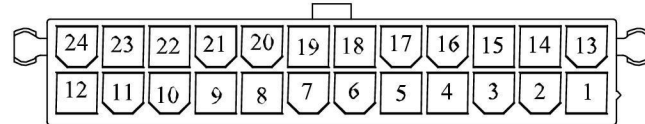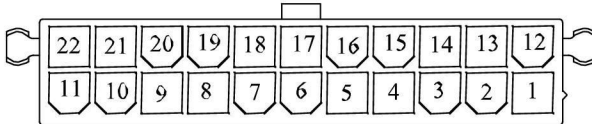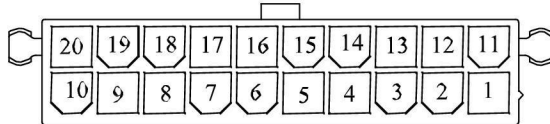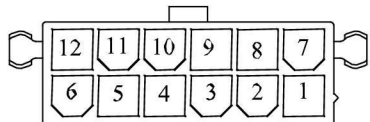

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	Ho Chien www.hochien.com
				X.X ±0.40	JYHuang	2012/09/17	UNIT	mm	WF4201-2WSXXW2	
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:	
AO	2012/09/17	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET	2/2	4.20 MINI FIT DUAL ROW 180° WITH SHORT BUMP AND DUAL POST	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3'			PROJ.	◆	Customer NO.	
				DIM TOL						